



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/IB 03/03722

13.08.03

MAILED 16 SEP 2003

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02102240.5

Best Available Copy

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

30/06/03

EPA/EPO/OEB Form 1014 - 02.91

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

DESCRIPTION

Transceiver apparatus for use in a multi-frequency communication system, base station of a multi-frequency communication system, method of use of the transceiver apparatus, method of transceiving a multi-frequency signal in a multi-frequency communication system

5

The invention relates to a transceiver apparatus for use in a multi-frequency communication system, comprising a signal processor, a frequency conversion circuitry, an antenna-switch and an antenna terminal having at least one antenna. Further, the invention relates to a base station of a multi-frequency communication system

10 comprising the transceiver apparatus. The invention also relates to a method of use of the transceiver apparatus and a method of transceiving a multi-frequency signal in a multi-frequency communication system, comprising the steps of processing the signal in a signal processor, frequency converting the signal in a frequency conversion circuitry, operating an antenna terminal by an antenna-switch and transceiving the signal by
15 means of at least one antenna of the antenna terminal.

Multi-frequency communication systems are currently in widespread use either for providing telecommunications, to mobile users in particular, or for contemporary or future applications of Personal Computer Networks (PCN), Digital Communication
20 Systems (DCS) or Global Systems of Mobile Communication (GSM). Multi-frequency communication systems are particularly prevalent in cellular radio frequency (RF) systems for users of various mobile telephone standards or cellular systems, such as digital Time Division Multiple Access (TDMA), Frequency Division Multiple Access (FDMA), or Code Division Multiple Access (CDMA). The varied system standards are
25 referred to hereinafter as modes.

The referenced systems usually operate either on a single frequency band or multiple frequency bands. The latter are referred to hereinafter as multi-frequency

communication systems. The frequencies are usually radio frequencies, the most prevalent being the 900 MHz, 1800 MHz or 1900 MHz bands. A limited number of carrier frequencies are available for each band, wherein each carrier frequency usually supplies a band of 30 KHz in width for signal transmission. As these carrier frequencies are a limited resource in the frequency spectrum, this imposes basic limits on the maximum user capacity of any transceiver apparatus or base station in a multi-frequency communication system. Generally directional antennas are used which produce directional radiation beams that allow a single carrier frequency to be reused for a number of users. In comparison with omni-directional antennas or conventional sectorial antennas, such a measure increases the system capacity. Further, in most of the referenced systems a cell search is necessary to track a mobile user who is literally mobile.

The above listed systems generally comprise a signal processor, which is used for processing a modulated signal in a transmitter and/or receiver section and also for digital and/or analog signal conversion . The analog signal therein is supplied to a frequency conversion circuitry in order to frequency-convert the signal and modulate or demodulate the signal with regard to a radio frequency. The radio frequency is used as a carrier frequency for signal transmission and/or receipt. Such a signal is usually supplied to a switching device, hereinafter referred to as an antenna switch, in order to switch the multi-frequency signal destination. This is particularly true for multiplex signals. Thus, the purpose of operating an antenna terminal is to transceive the signal by means of at least one antenna of the antenna terminal.

Each of the devices, i.e. a signal processor, a frequency conversion circuitry, an antenna-switch or an antenna terminal, has to be adapted and tuned to the others in such a way, that they coordinate smoothly and allow the transceiver apparatus to operate correctly with regard to a specific frequency, a transmission-mode or a reception-mode and/or mode regarding a certain system standard.



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 02102240.5

Anmeldetag:
Date of filing:
Date de dépôt: 29/08/02

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
a multi-frequency signal in a multi-frequency communication system®

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BG/BE/CH/CY/CZ/DE/DK/EE/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/
Etats contractants désignés lors du dépôt:

Bemerkungen: See for the original title of the application, page 1 of the description.
Remarks:
Remarques:

The principle operation of a transceiver apparatus is disclosed in US 5,579,341 for instance. A multi-channel digital transceiver for receiving up-link radio frequency signals and converting these signals to digital intermediate frequency signals is included therein. Digital signal processing, by means of a digital converter module, is applied and intermediate frequency signals received by a plurality of antennas are converted to base band signals. The base band signals are in turn processed in order to recover a communication channel. Down-link base band signals are also processed and the integrated digital signal processing in the digital converter module up-converts and modulates the down link base band signals into digital intermediate frequency signals. The digital intermediate frequency signals are converted into analog radio frequency signals, amplified and radiated from transmit antennas. However, such modules use separate antennas and transceivers for a transmission-mode and a reception-mode respectively. This has certain drawbacks with regard to a multi-channel communication system. Unlike traditional communication units, which are designed to operate under a single information signal coding and channelization standard only, the multi-channel communication unit disclosed in US 5,579,341 already includes a digital signal processing portion which, at least in principle, may operate in accordance with any one of the numerous information signal coding and channelization standards. Nevertheless, its antenna design contains significant drawbacks. In particular, a multi-frequency operation is not possible in an advantageous way. The teachings of US 5,579,341 are directed towards a wide band but single frequency operation.

Certain drawbacks are also inherent in a switching device used in a transceiver as disclosed in EP 1 073 208 A2, wherein a high frequency switching component with two states is disclosed. In the first state a reception circuit is connected to the antenna terminal and in the second state the transmission circuit is connected to the antenna terminal. Here a separate mode of transmission and reception forms an inherent part of the operation, i.e. a combined transmission and reception operation is not possible.

Further systems are already suitable for multi-frequency operations, however these contain additional drawbacks. In EP 1 330 080 a multi-frequency radio communication device and a method of controlling antenna timing provides an antenna-switch for temporal sequential switching of antennas according to a predetermined pattern. Such predetermined patterns make the disclosed system rather inflexible and restrict the system to a TDMA mode. Similarly, a system disclosed in WO 98/24195 is suitable for multi-frequency application, but is however, restricted to a base station operation in TDMA mobile communication mode. Consequently, the layout of such systems may be rather simple, but the systems are inflexible as regards both design and operation.

In most switching devices for multiplexing, a Butler-matrix such as the one disclosed in US 6,104,935 is used to advantage. The down-link beam-forming architecture for heavily overlapped beam configuration disclosed therein, however, is specifically adapted for TDMA mode applications, i.e. different modes may not be combined. Further, the Butler-matrix disclosed therein may be improved with regard to certain items as far as a multi-mode and/or multi-frequency operation is concerned.

As regards the antenna terminal and the antennas of such antenna terminals, an antenna is usually adapted for single frequency operation in prior art. For instance, the antenna disclosed in US 6,034,640 is restricted to a single frequency range at 900 MHz. Although the antenna is adapted by a frequency adjusting circuit for the adjustment of the resonant antenna frequency in such a frequency range, a multi-frequency antenna application, i.e. an application for several frequency bands, is not feasible.

Various kinds of multi-frequency antennas are disclosed in US 6,225,958 B1, US 6,225,951 B1 and US 6,198,443 B1. A separate slot antenna is disclosed in US 6,210,001 B1. However, what is neither disclosed nor apparent is, if and how these antennas may be used in a transceiver apparatus in a multi-frequency communication system.

Other transceivers such as the one disclosed in US 5,809,405 either use a number of duplexers for switching an antenna or several switches for switching an antenna, like in US 5,991,643, or a simple cross-switch such as the one in WO 98/24195.

5

As regards cell search strategies, a proper strategy is provided in EP 1 126 630 A2. Other search characteristics such as the one disclosed in US 6,188,682 B1, are directed towards a CDMA mode for improving such searches by multiplexing two kinds of signals. With regard to CDMA search schemes, further disclosures are made in US 10 6,185,244 B1, US 6,038,250 B1, US 5,910,948, US 6,285,874 B1, US 6,310,856 B1 and WO 00/65735, which are, however, cited only for purposes of background information only.

As outlined above, none of the systems is able to provide a proper transceiver apparatus 15 made of flexible design, which may be used in a multi-frequency communication system. In particular, neither multi-mode nor combined operations are possible in such prior art systems.

This is where the invention comes in, the object of which is to provide an apparatus for 20 use in a multi-frequency communication system, a method of use of such an apparatus and a method of transceiving a multi-frequency signal in a multi-frequency communication system of flexible design and operation.

As regards the apparatus, the object is achieved by the transceiver apparatus referenced 25 in the introduction, wherein in accordance with the invention

- the frequency conversion circuitry has a transmission path and a reception path, wherein each of the paths communicatively connects the signal processor and the antenna-switch,
- the antenna-switch comprises a multi-switch, a transmission-multiplexer and a 30 reception-multiplexer, wherein the multiplexers are controllable by the signal

processor via the multi-switch,

- the antenna has a transmission-connector for connecting the transmission-path to the antenna and a reception-connector for connecting the reception-path to the antenna,
- wherein the antenna-switch, controllable by the signal processor, allows multi-frequency operation of the antenna by combining a transmission-mode and a reception-mode of the antenna .

The main concept of the invention is to advantageously combine an antenna transmission-mode and a reception-mode in the transceiver apparatus. Consequently, the proposed frequency conversion circuitry has a combined transmission and reception path. The antenna-switch also supports this concept by providing a transmission-multiplexer and a reception-multiplexer. The antenna has an extremely advantageous transmission-connector for connecting the transmission path to the antenna and a reception connector for connecting the reception path to the antenna. This combination of transmission and reception-modes - which affects the layout of the frequency conversion circuitry as well as of the antenna-switch, the antenna terminal and the antenna - allows a particularly simple and flexible design of the transceiver apparatus and operation. This will be further outlined in the method claims.

As regards the method, the object is achieved by the method referenced in the introduction, wherein according to the invention

- frequency converting of the signal in the frequency conversion circuitry is established on a transmission path and a reception path, wherein each of the paths communicates the signal between the signal processor and the antenna-switch,
- multi-frequency antenna terminal operation is established by combining a transmission-mode of the antenna and a reception-mode of the antenna, controlled by the signal processor, by means of:
 - the antenna-switch, which comprises a multi-switch, a transmission-multiplexer and a reception-multiplexer, wherein the multiplexers are controlled by the signal processor via the multi-switch, and

- communicating the signal between the transmission-path and the antenna via the transmission-multiplexer and a transmission-connector of the antenna, and between the reception-path and the antenna via the reception-multiplexer and a reception connector of the antenna.

It has been realized by the invention, that such a system, wherein all necessary components are adapted to each other with respect to the combination of transmission and reception-modes allows the processing of multi-frequency communication with high quality and minimal losses. Further, the system costs of the transceiver apparatus and operation thereof are extremely low.

As will be outlined in the method of use claims, such transceiver apparatus can be used advantageously in a number of multi-mode or combined systems, i.e. in a number of systems having different standards, for instance to allow a cellular wireless communication and/or usage within personal communication systems.

Particularly advantageous use that an antenna of the proposed transceiver may be used for both a transmission-mode and a reception-mode. This depends on the situation. Further, the antenna is switched in an advantageous and easy way.

As regards the method of use, the object is achieved according to the invention by a method of use of the transceiver apparatus in a multi-frequency communication system such as a mobile cellular communication system or personal communication system. In particular, a mobile cellular communication system may include CDMA, a FDMA or a TDMA modes or systems. A combined or multi-mode communication system may also be selected, such as a CDMA-FDMA/TDMA and /or a FDMA-TDMA system, in particular a 2.5 G system.

A PCS/N, 3G mode and/or GSM system may be specifically selected. As regards a personal communication system, in particular a mode of a PCS/N, 3G and/or GSM system may be selected. Also a multi-mode or combined system of 3G/GSM is also

advantageous.

In particular, a method of use of the transceiver apparatus in a mobile cellular communication system is advantageous in combination with a personal communication system.

5

These and other advantages of the invention are improved to an even greater extend by further developed configurations of the invention, which are outlined in more detail in the dependent claims.

- 10 In accordance with another advantageous aspect of the invention, the signal processor is an analog digital signal processor formed by a direct digital synthesizer (DDS) driven phase locked loop (PLL) radio frequency signal generator. Such a signal processor is particularly suitable for generating a modulated transmitter signal and a local oscillated receiver signal .

15

In accordance with yet another aspect of the invention, the frequency conversion circuitry advantageously comprises at least one local oscillator and a power divider to supply local oscillator power to the transmission and/or reception path. In one configuration thereof, the frequency conversion circuitry may comprise a mixer device

- 20 for converting the signal between an intermediate frequency and a radio frequency. In another configuration thereof the frequency conversion circuitry may comprise a direct conversion device for converting the signal between a base band frequency and a radio frequency, in particular by means of an in-phase and quadrature (IQ) method.

- 25 In a receive mode, the direct digital synthesizer driven phase locked loop preferably has a narrow band filter to produce a better phase noise. In another configuration in a zero intermediate frequency (zero IF) the receiver demodulation may directly convert a radio frequency signal to a base band frequency. In a transmitter mode, the DDS modulates the signal and the PLL may operate in a broader bandwidth than a receive mode to

30 achieve a better RF modulated signal. A transceiver comprising the described DDS with this aspect of the invention achieves an advantageously fast switch speed and may be

manufactured at low costs.

To allow for a combined transmission and reception-mode, and in particular for a multi-mode or combined system, according to further aspects of the invention, a specific design of antenna-switch, antenna terminal and an antenna of the antenna
5 terminal is provided.

In accordance with a further aspect of the invention, the antenna terminal preferably comprises a patching unit formed as a low-pass filter to improve the process of matching the antenna with different frequencies within the multi-frequency spectrum
10 and/or different modes of a mobile cellular communication or personal communication system. The antenna terminal may, in particular, comprise a matching unit for the antenna. An LC-component would be the most advantageous, to provide an optimal matching factor for the antenna.

15 The antenna terminal advantageously comprises at least two, usually four antennas. This allows the flexible application of common main frequency bands. In particular, a first antenna may be provided for a frequency band range of 850 – 900 MHz, a second antenna for a frequency band range of 1800 MHz to 1900 MHz, a third antenna for a frequency band range of 2000 MHz to 2100 MHz and a fourth antenna for additional
20 radio frequency inputs and may also be adapted for beaming. Preferably, all of these antennas should operate in receive mode. In particular, all, or at least one of the antennas, should also operate in transmission-mode, and preferably in parallel and/or combination mode. Thus, four corresponding switches may be used to switch the antennas and to ensure that the common main operates as flexibly as possible.

25

In accordance with a still further aspect of the invention, the antenna is formed as an s-loop antenna with two ends, the ends preferably being formed as the transmission connector for connecting the transmission path to the antenna and the reception connector for connecting the reception path to the antenna. This allows the transceiver
30 to switch advantageously from one antenna to the other in an X-function manner. The

process is best regulated by the signal processor which controls the multiplexers.

In one configuration the antenna is a copper-wired, flexible-line antenna made of copper. This is a particularly cost-effective method of manufacturing an antenna.

- 5 In another configuration the antenna may be an SMD-planar-antenna. This is a preferred antenna form and may also be selected depending on the application.

As regards the patching and/or matching unit, such units are preferably integrated as part of the antenna body.

10

The above outlined s-loop antenna configuration allows an advantageous beam design. In particular, the antenna terminal may form a 360 degree beam and the antenna beam is formed within a range of 200 degrees. The antenna beam advantageously comprises a 90 degree beam formed by a 50 degree main beam and two 20 degree side beams.

15

- In accordance with a yet still further aspect of the invention, the antenna-switch comprises a matching unit formed as a frequency regulated matching filter to provide an optimal matching factor for the antenna. It may also be preferred that the antenna-switch comprise a bus connection to the signal processor, the said bus connection being
20 advantageously formed as a matching network. A particularly preferred embodiment of the matching network is illustrated in Figure 9 in the detailed description.

- The switch outlined in this aspect of the invention allows an advantageous switching speed of more than 477 μ s. This is a particular preference as, in a GSM-system, the
25 speed of a switch should be faster than one cycle. The transceiver apparatus may also be applied as outlined above to a multi-mode system, i.e. several modes may be used in parallel operation. In particular, this means that the transceiver apparatus may be operated in a GSM-band, at 1900 MHz for instance, and also in parallel operation in a typical 3G-mode. Roaming may be permissible according to ETSI and 3G-group
30 specifications.

The described patching and matching units allow all integrated antennas to be used advantageously for all system frequencies .

5 In accordance with yet still even further aspect of the invention, a particularly preferred beam forming matrix device is integrated into the antenna-switch. In particular, the antenna-switch further comprises a beam forming matrix device, formed as a Butler-output matrix. Such a matrix may be selected from the group consisting of: a 4 x 4, a 8 x 8 or a 16 x 16 Butler-output matrix.

10

An existing matching unit inside the Butler-matrix is also preferable. As a particularly preferred configuration thereof, a modified Butler-output matrix output/input is formed as a frequency-regulated matching filter. This also allows the advantageous provision of an optimal matching factor for the antenna.

15

In summary, it is proposed that in order to allow the multi-frequency operation of an antenna terminal, which combines antenna transmission and reception-modes, in a transceiver apparatus for use in a multi-frequency communication system, a frequency conversion circuitry should include both a transmission path and a reception path,

20

wherein each of these paths communicatively connects the signal processor and the antenna-switch. The antenna-switch comprises a multi-switch, a transmission-multiplexer and a reception-multiplexer, wherein the said multiplexers may be controlled by the signal generator via the multi-switch. The antenna has a transmission connector for connecting the transmission path and a reception connector for connecting the reception path to the antenna. The antenna-switch is regulated by the signal processor. Advantageous configurations therefore provide an s-loop antenna design, and phase matching units in an antenna terminal and a Butler-matrix of the antenna-switch. This allows an optimal matching factor for each of the antennas and for matrix usage.

25

30 Whereas the invention is particular suitable for, and is described as being associated

with specific multi-frequency communication systems, it should be understood that the transceiver apparatus and its method of operation may also be operated in association with other forms of multi-frequency communication systems not specifically mentioned. In particular, the preferred transceiver apparatus may not only be used in a mobile communication system, but the basic transceiver principle may also operate in a typical base station environment. The transceiver apparatus is also particularly suitable for use in multi-mode or combined multi-frequency communication systems, in particular in systems which allow CDMA-FDMA/TDMA and FDMA/TDMA (2.5 G) processing. This is particularly achieved by the specific beam design as outlined above with regard to one or more aspects of the invention. As regards combined operation, operation within a GSM/PCM/DCS system is achieved by combining the 850 MHz to 2100 MHz antenna terminals, as is also outlined with regard to one or more aspects of the invention. Such antenna terminals also provide the user with an increased propagation security.

15

To facilitate a more complete understanding of the invention, preferred embodiments of the invention will now be described in detail with reference to the accompanying drawings. The detailed description will illustrate and describe the considered preferred embodiment of the invention. It should, of course, be understood that various modifications and changes in form or detail could readily be made without departing from the spirit of the invention. It is therefore intended that the invention may not be limited to the exact form and detail shown and described herein, nor to anything less than the whole of the invention disclosed herein and as claimed hereinafter. Further the features described in the description, the drawing and the claims disclosing the invention, may be essential for the invention, considered alone or in combination.

20
25

Fig. 1 is a diagram illustrating a basic construction of a first embodiment of a transceiver apparatus to allow combined transmission and reception-modes according to a preferred embodiment;

Fig. 2 is a diagram illustrating a basic construction of a second embodiment of a transceiver apparatus to allow combined transmission and reception-modes;

Fig. 3 is a wiring diagram illustrating the basic principle of an antenna terminal comprising four s-loop antennas, which may be operated in a switched or coupled multi-frequency mode;

Fig. 4 is a wiring diagram illustrating a preferable implementation of an s-loop antenna into a terminal having a matching network integrated therein;

Fig. 5 shows an evolution of an antenna signal, when using two antennas in a preferred embodiment;

Fig. 6 is a schematic wiring diagram showing a further preferable implementation of two s-loop antennas into a terminal having a filter network, wherein the filter operates with a capacity coupled network for different frequencies;

Fig. 7 is a wiring diagram illustrating a preferred embodiment of an antenna-switch in a preferred embodiment;

Fig. 8 is a wiring diagram illustrating another preferred embodiment of an antenna switch in another preferred embodiment;

Fig. 9 is a wiring diagram illustrating a switching network in yet another preferred embodiment;

Fig. 10 is a schematic view of a 4 x 4 Butler-matrix having a modified output/input as a frequency regulated matching filter for an optimal matching factor of the beam antenna in a preferred embodiment;

Fig. 11 is a schematic view illustrating a typical s-loop antenna design in a preferred embodiment;

Fig. 12 is a schematic illustration of the beam formation of an antenna terminal comprising four antennas in a preferred embodiment.

Figure 1 illustrates a preferred transceiver apparatus 1 embodiment in a conceptual diagram. A signal is digitally processed in a signal processor DDS which is formed as a direct digital synthesizer driven phase locked loop (PLL) radio frequency (RF) signal generator. The processor DDS comprises a digital analog conversion unit DA for converting a digital signal into an analog signal. The signal processor DDS also comprises an analog-digital conversion unit AD for converting an analog signal into a digital signal. Further, the transceiver apparatus 1 comprises a frequency conversion circuitry 3, wherein a transmission-path Tx is formed by an intermediate frequency modulator Tx₁, a mixing device Tx₂ and a radio frequency transmit channel Tx₃. Further, a reception-path of the frequency conversion circuitry 3 is formed by an intermediate frequency demodulator Rx₁, a mixing device Rx₂ and a radio frequency receive channel Rx₃. Using the transmission-path, the modulated signal is modulated in an intermediate frequency (IF) range by the intermediate frequency modulator Tx₁ and is converted to radio frequency (RF) by means of the mixing device Tx₂. A radio frequency signal is supplied to the antenna system 2 by means of a radio frequency transmit channel Tx₃. The transmit channel Tx₃ comprises suitably adapted components such as a filter, an amplifier and a switch.

Parallel to signal processing on the transmission-path Tx a received radio frequency signal may also be processed via the reception-path Rx through the radio frequency receive channel Rx₃. A radio frequency receive channel Rx₃ may include suitably adapted components such as a filter and a low noise amplifier. The radio frequency signal is further down-converted into an intermediate frequency signal by means of a mixing device Rx₂. Additional components such as a filter or an auto gain controller

may also be provided. The received signal is further processed in the reception-path Rx via an intermediate frequency demodulator Rx₁ and supplied to the signal processor DDS, and in particular to the analog digital unit AD. For frequency conversion in a mixing device Rx₂ and/or Tx₂ in the preferred embodiment of Figure 1 two local
5 oscillators O₁, O₂ are used. A first local oscillator O₁ is provided in the intermediate frequency range and a second local oscillator O₂ is provided in the radio frequency range. The local oscillators O₁, O₂ signal power is divided by the respective power divider means D₁, D₂. The divided power of the intermediate frequency local oscillator O₁ is supplied, depending on the situation, to either the intermediate frequency
10 modulator Tx₁ of the transmission-path Tx or the intermediate frequency demodulator Rx₁ of the reception-path Rx. The divided power of the radio frequency local oscillator O₂ is supplied, depending on the situation, to either the transmission-path mixing device Tx₂ or the reception-path mixing device Rx₂. The radio frequency local oscillator is also adapted to supply power to the antenna-switch SW. In this preferred embodiment a local
15 oscillator is implemented using a phase locked loop (PLL), thereby providing a good frequency stability while still maintaining a sufficient switching speed.

In the preferred embodiment of Figure 1 an antenna system 2 comprises an implemented antenna-switch (SW) and an antenna terminal (AT) with at least one antenna (A).

20

The typical four s-loop antennas are preferably built in a housing as a copper wired system. An SMD-planar system may also be used as an alternative or in combination, if so preferred. The copper wired solution should, however, be more cost effective.

25 As will be described in more detail throughout the system, a matching unit is provided properly in respective components in order to make proper and efficient use of all integrated antennas for all frequencies. In particular, a matching unit is built into each of the antennas. A patching unit is also built as a low-pass filter to use all integrated antennas of the antenna system for all frequencies. The wires of the antennas are used
30 particularly as antennas with a transmissionpath Tx connector on one side and a

receptionpath Rx connector on the other side. The system is preferably switched from one antenna to the other in an X-function regulated manner by the signal processor DDS. Details will be provided with particular regard to Figure 3.

As will be described in more detail with regard to Figures 7, 8 and 9, an antenna-switch SW, SW' comprises several multiplexer switches, at least one transmission-multiplexer TxMUX and a reception-multiplexer RxMUX, wherein each of the multiplexer switches are controlled by the signal processor. This allows the transceiver apparatus of this preferred embodiment to operate at a particular high switching speed, i.e. faster than a contemporary cycle time of 477 μ s. It is also possible for a transceiver apparatus of this preferred embodiment to be used in a multi-mode system, i.e. the transceiver apparatus of the preferred embodiment may be operated in a GSM-band such as 1900 MHz and also in parallel operation with a typical 3G-mode. Roaming is also permissible with this transceiver apparatus according to ETSI and 3G-group specifications.

15

In Figure 2 a second preferred transceiver apparatus embodiment 1' is illustrated in a schematic view. Whereas the functional principle is more or less the same as in the embodiment 1 described with respect to Figure 1, the preferred embodiment 1' of Figure 2 is construed as a direct conversion system in TDD-mode. In a frequency conversion circuitry 3', the modulated signal of a signal processor DDS is modulated directly into a radio frequency range using a radio frequency direct modulator Tx₁' in a transmission path Tx'. The signal is further processed in a radio frequency transmission channel Tx₂' and supplied to an antenna-switch SW'. Further, in a reception path Rx' a radio frequency receive channel Rx₂' receives a modulated signal via the antenna-switch SW' and supplies the modulated signal to a radio frequency direct demodulator Rx₁', which demodulates the radio frequency signal directly to base band, i.e. zero intermediate frequency (zero IF). The direct modulation by means of the direct modulator Tx₁' and demodulation by means of the direct demodulator Rx₁' is performed by using the in-phase quadrature (IQ) method wherein in-phase components

30 (I) and quadrature components (Q) are provided. In this particular preferred

embodiment one local oscillator O is sufficient for implementation via a PLL. The power of the local oscillator O is supplied to either the direct modulator Tx_1' or the direct demodulator Rx_1' by means of a divider D.

- 5 In this particular preferred embodiment 1' an external antenna-switch SW' is used to communicate a signal either to or from an antenna system 2' comprising an antenna terminal AT' with at least one antenna A. The antenna system and, in particular, the antennas A of the antenna terminal AT' may be manufactured in the same way as described with regard to the preferred embodiment of Figure 1.

10

- Figure 3 illustrates the basic principles of an antenna system 2, 2' comprising an antenna terminal AT, AT' of four antennas A_1, A_2, A_3 and A_4 . Each of the antennas $A_1 \dots A_4$ is connected on one side via a patching network to the transmission path Tx and on the other side via a patching network to the reception path Rx. The respective
- 15 connections are referred to as channels. For instance, the antenna A_1 has a transmission connector CT_1 connecting the transmission channel Tc_1 via a patching network with an LC-unit L_1, C_1 , built as a low pass filter to use the antenna A_1 for all frequencies to the transmission path Tx. Further, the antenna A_1 comprises a reception connector CR_1 for connecting the reception channel Rc_1 to the reception-path Rx. Further, the connection
- 20 is made by means of a switch Z_1 . The switch Z_1 is in the OFF position if the transmission-channel Tc_1 is used for the antenna A_1 . The switch Z_1 is in the ON position if the reception-channel Rc_1 of the antenna A_1 is used. Antenna A_1 is specifically adapted to operation in a frequency range of 850 to 900 MHz. Accordingly, the further components, i.e. the patching network L_1, C_1 and the switch Z_1 and other components
- 25 are also adapted with regard to the particular frequency range of 850 MHz to 900 MHz.

- Basically, the other antennas A_2, A_3 and A_4 are connected in the same way to a reception-path Rx via a reception-channel Rc_2, Rc_3 and Rc_4 and to a transmission path Tx via a transmission channel Tc_2, Tc_3, Tc_4 , respectively. Accordingly, each of the
- 30 antennas A_2, A_3 and A_4 include respective transmission connectors CT_2, CT_3 and CT_4

and reception connectors CR_2 , CR_3 and CR_4 . The switches Z_2 , Z_3 and Z_4 respectively are also basically allocated in a analogue manner as described with regard to antenna A_1 . The same holds true of the patching networks L_2 , C_2 and L_3 , C_3 and L_4 , C_4 respectively. However, the difference is that the connections, the patching network and the respective antenna channels are adapted for different frequency ranges. As outlined above, the antenna A_1 , its connectors and patching network are adapted to operate correctly within a frequency range of 850 MHz to 900 MHz. The corresponding layout of the antenna A_2 and its connectors and patching network and transmission/reception-channels are adapted to operate correctly within a frequency range of 1800 MHz to 1900 MHz. The antenna A_3 and its corresponding components are adapted to operate correctly within a frequency range of 2000 MHz to 2100 MHz. Of course, each of the antennas may also operate at frequencies exceeding the specified ranges, however, by tuning each of these antennas optimal performance is achieved within the specified frequency range for each antenna. A broad frequency range is particularly suitable for antenna number four A_4 and its connectors, patching network and reception/transmission-channels. The antenna A_4 and its components are adapted to operate at various different radio frequency inputs and provide a proper beaming tool.

As regards the material used for the antennas, each of them is formed as an s-loop as is essentially shown in Figure 3. As outlined above, an antenna may be configured as a copper wire, with all antennas being housed in the antenna terminal, as indicated by the dashed line in Figure 3. Alternatively, if preferred, each or a number of the four antennas may also be configured as an SMD-planar antenna implemented in an integrated antenna terminal, as indicated by the dashed line in Figure 3.

25

Figure 4 shows another embodiment with an integrated patching network, which is formed as a low pass filter, consisting mainly of an LC unit. Each LC unit is connected to a connection point CP_1 , CP_2 of the antenna A. Either of the connection points CP_1 or CP_2 may be switched as a transmission connector or as a reception connector. Such a choice depends on the switching status of either of the switches $Z_1 \dots Z_4$. Each of the

30

switches $Z_1... Z_4$ is adapted to set a respective channel, i.e. a transmission channel Tc_n , Tc_{n+1} , or a reception channel, i.e. channel Rc_n or Rc_{n+1} , to the OFF or ON status. "N" may symbolize any number of antennas in an antenna terminal. In this particular embodiment, the patching network is integrated in the s-loop antenna A, which is indicated by the dashed line comprising the antenna A and the patch network. Further, the polarization direction is indicated by the line P in Figure 4, i.e. the plane of polarization extends perpendicular to the plane of Figure 4 and comprises the line P as a projection.

- Figure 5 indicates the time delay between a signal S_1 of an antenna A_1 and a signal S_2 of an antenna A_2 with regard to each other, when both signals radiate substantially in the same direction. The time delay is approximately linearly proportional to the distance D of both antennas and the angle θ between the radiation fronts, as indicated in Figure 5. The time delay ΔT from antenna A_1 to antenna A_2 may be described by the formula:
- $\Delta T \sim (D/c \sin \theta)$, where c is the light velocity.

- A particularly preferred "intelligent" antenna configuration may be an s-loop wired copper antenna based on a flex strip with a matching unit on each end and a quadrature hybrid with a tri-state radio frequency functionality and an open loop part (tri-state part).
- Phase shifters with fixed parameters may be used to compensate the time delay ΔT between the radiation radiated by two such antennas A_1 and A_2 .

In Figure 6 a PI-filter network with only two antennas A'_1 and A'_2 is shown as another example of an antenna terminal AT" with a patching unit built as a low pass filter and a network connection N for further signal processing. In this particular example, the patching unit PU' is designed to use all integrated antennas for different frequencies and modes in parallel operation. The filter therefore operates particularly well with a capacity coupled network for different frequencies. The inset I_1 indicates the functional symbol for the patching unit PU'. In the additional inset I_2 filter curves are shown for various frequencies.

Figure 7 illustrates the principle of the antenna-switch SW or SW' in the form of a wiring diagram. An antenna-switch SW or SW' is indicated by the dashed line in Figure 7 and comprises a multi-switch MSW and a transmission-multiplexer TxMUX for multiplexing a transmissionpath Tx signal and a reception-multiplexer RxMUX for multiplexing a receptionpath Rx signal. The multiplexers TxMUX and RxMUX may be controlled by the signal generator DDS via the multi-switch MSW as indicated by arrows and the dashed line in Figure 7. Each of the connectors Tc₁... Tc₄, Rc₁... Rc₄ are multi-switched by the multiplexers TxMUX and RxMUX respectively depending on the state of the multi-switch MSW, which in turn is used for switching the switches Z₁... Z₄. Depending on the situation, transmission multiplexing 4 and reception multiplexing 5 are accomplished by the TxMUX and RxMUX multiplexers respectively, which switch the connector channels of each of the antennas A₁... A₄ (as described with reference to Figure 3). In such a way an operation in one of the states shown in the lower part of Figure 7 is achieved. In particular, these applications comprise transmission Tx and reception Rx in a frequency band range of approximately 900 MHz, transmission and reception in a frequency band range of approximately 1800 MHz, transmission Tx and reception Rx in a frequency band range of 1900 MHz and transmission Tx and reception Rx in a combined 3G and TD-SDMA, ϕ -CDMA or ϕ -CDMA/ARIB operation.

The digital signal processor DDS preferably operates the multi-switch MSW by means of an "advisor"-algorithm, in particular, based on a combiner switch to operate the OFF-switches Z₁... Z₄. A particular method of operating the multiplexers TxMUX and RxMUX is to optimize an average square error for each of the available channels (Tc₁... Tc₄ and Rc₁... Rc₄). Switching is best performed, if the average square error is minimized for a specific channel switched by the multiplexer. A decision as to which available path should be switched by the multiplexer may be made by comparing the received values in a channel with regard to thresholds. In this particular case a threshold may be a noise threshold.

Figure 8 essentially shows the same switch as that shown and described in Figure 7. The antenna-switch SW, SW' comprises a transmission-multiplexer TxMUX for multiplexing 4 four channels of different frequencies and possible combined applications and a reception-multiplexer RxMUX for multiplexing 5 four corresponding channels Tc, Rc 1... 4 respectively. The multiplexers RxMUX and TxMUX are controlled by the DDS via a system interface and a multi-switch MSW. In addition to the components shown in Figure 7, a matching unit 6 is provided for the antenna-switch SW, SW' in Figure 8 to allow an optimal matching factor for the respective antennas and reception and transmission channels.

Figure 9 essentially shows an antenna-switch formed as a multi-switch driven combination of two multiplexers as already shown in Figures 7 and 8. The switching network is shown as an additional example to connect a transmission channel Tx via Tc₁ ... Tc₄ and a reception channel Rx via Rc₁ ... Rc₄. The bus connection to the digital signal processing DSP via the interface is also shown, as has already been indicated in Figure 8. The arrows in the upper part of Figure 9 indicate bus connections to a first end 1 ... 4A of four s-loop antennas A₁ to A₄ of an antenna terminal, bus connections to another end 1... 4E of four s-loop antennas A₁ to A₄ of an antenna terminal AT and bus connections to the switches Z₁ ... Z₄ of an antenna terminal AT, as shown in Figure 3 for example.

In Figure 9, the multi-switch MSW and the multiplexer MUX are represented as a series of switches for switching transmission and reception channels Tc₁ ... Tc₄ and Rc₁ ... Rc₄ respectively. The dots in Figure 9 with regard to the transmission and reception channels Tc_i and Rc_i respectively indicate that the number of channels /antennas is not restricted to four, but may be any suitable and advisable number, depending on the situation. For instance, two antennas could also be used as shown in Figure 6 or even 3 antennas or more antennas like five, six, seven, eight antennas.

An antenna-switch may comprise a beam forming device such as a Butler-matrix.

Figure 10 essentially shows the preferred embodiment of a YxY Butler-matrix exemplified by a 4 x 4 design. This particular Butler-matrix has a modified output OUT and input IN. Each output OUT and input IN comprises a frequency regulated matching filter for the provision of an optimal matching beam antenna factor. Each of the matching filters MF₁, MF₂, MF₃, MF₄ of the Butler-matrix BM is formed by an LC unit with a controllable capacity. A matching unit's wiring diagram Mfi is shown in the inset I₁ of Figure 10 and the respective switching symbol in inset I₂ of Figure 10.

Figure 11 illustrates the typical configuration of an s-loop antenna with two reflecting side walls S1 and S2 to form a reflecting wave guide W therebetween. The inset I₁ of Figure 11 indicates that the length "l" of an antenna is a function of the wavelength λ to be transmitted and/or received by the antenna A. Also the distance "a" between each of the reflecting side walls S1, S2 and the wave guide W is a function of the wave length " λ " transmitted/received by the antenna:

$$a = f(\lambda, c); l = f(\lambda, c)$$

Consequently, as indicated in the inset I₁ of Figure 11, the distance "a" and the length "l" are to be varied correspondingly for each of the antennas A₁ to A₄. In this example these are referred to as "Loop 1" and "Loop 3". Each of the antennas is thereby adapted to operate correctly within a specific frequency range.

By diagrammatically illustrating the beam width and an aperture size caused by such an antenna terminal, figure 12 indicates the radiation characteristics of an antenna terminal comprising four s-loop antennas, as shown in Fig. 3 for example. The antenna terminal has a 360 degree beam characteristic 10 with four quarter sectors, wherein each quarter sector is formed by a 90 degree section, the beam therein is formed by one of the terminal's s-Loop antennas. The sectors are referred to in the picture as "S-loop 1", "S-loop 2", "S-loop 3" and "S-loop 4". The 90 degree sections are indicated by double-

dashed lines. Each 90 degree section comprises a 50 degree main beam MB1, MB2,

MB3, MB4 of one loop as well as two 20 degree smaller side beams SB1, SB2, SB3, SB4, which are arranged on each side of the main beam and may be referred to as a parallel beam.

- 5 The four antennas are adapted to cover a spectrum of $\lambda/8$ to $\lambda/16$.

In summary, a transceiver is provided, which is adapted for use in most contemporary and future communication systems, and in which a direct digital synthesizer driven phase locked loop radio frequency signal generator is used to generate a modulated
10 signal in a transmitter and a local oscillated signal in a receiver. Four switches are used in a particularly preferred embodiment to ensure that the common main part operates flexibly. In receive mode the direct digital synthesizer driven phase locked loop operates in the same way as a local oscillator, but with no modulating signal, thus, the phase locked loop has a narrow band filter in order to produce a better phase noise. The
15 receiver demodulation operates in a zero intermediate frequency to directly convert a radio frequency signal to the base band in a preferred embodiment. In transmitter mode, the direct digital synthesizer is modulated and the phase locked loop operates in a valuable bandwidth in order to produce a better radio frequency modulated signal. The fact that the proposed transceiver comprises the direct digital synthesizer allows a fast
20 switch speed to be achieved and allows the transceiver to be manufactured and developed at a lower cost than contemporary embodiments. This in turn means that a special antenna construction is needed for such multi-mode or combined systems, which may allow the specific design of a beam for a CDMA-FDMA/TDMA and FDMA/TDMA (2.5 G), and, of a combined 850 MHz to 1900 MHz antenna with
25 propagation security for the user for GSM/PCM/DCS,. The transceiver is especially adapted for use in mobile phones. In particular, the proposed transceiver is formed in an advantageous antenna design with a multi-switch and connection path for switching the antennas of the antenna terminal. In particular a preferred Butler-matrix is provided in the antenna-switch with a modified input/output form as matching units. The antennas
30 of the antenna terminal may also be matched with regard to the use of different frequencies or modes. The beam formation of the proposed transceiver antenna terminal

is particularly adapted to allow advantageous cell detection options . The transceiver
may be particularly used in 3G/GSM, PCS, PCN networks to combine different Rx and
Tx paths, or in a mobile phone. The basic principle, however, could also be used in base
stations and other suitable communication system devices . Particularly advantageous
5 are both parallel multi-operation in different networks or systems and optional parallel
transmitting and receiving, if necessary.

CLAIMS

1. Transceiver apparatus (1, 1') for use in a multi-frequency communication system, comprising:

- a signal processor (DDS)
- a frequency conversion circuitry (3, 3')
- 5 - an antenna-switch (SW, SW'), and
- an antenna terminal (AT, AT') having at least one antenna (A, A₁, A₂, A₃, A₄)

characterized in that

- the frequency conversion circuitry (3, 3') has a transmission path (Tx, Tx') and a reception path (Rx, Rx'), wherein each of the paths communicatively
10 connects the signal processor (DDS) and the antenna-switch (SW, SW'),
- the antenna-switch (SW, SW') comprises a multi-switch (MSW), a transmission-multiplexer (TxMUX) and a reception multiplexer (RxMUX), wherein said multiplexers (TxMUX, RxMUX) are controllable by the signal processor (DDS) via the multi-switch (MSW),
- 15 - the antenna (A, A₁, A₂, A₃, A₄) has a transmission-connector (CT₁, CT₂, CT₃, CT₄) for connecting the transmission path (Tx, Tx') to the antenna (A, A₁, A₂, A₃, A₄) and a reception-connector (CR₁, CR₂, CR₃, CR₄) for connecting the reception path (Rx, Rx') to the antenna (A, A₁, A₂, A₃, A₄),
- wherein the antenna-switch (SW, SW'), controllable by the signal processor,
20 allows multi-frequency operation of the antenna-terminal (AT) by combining a transmission-mode and a reception-mode of the antenna (A, A₁, A₂, A₃, A₄).

2. Transceiver apparatus as claimed in claim 1, characterized in that the signal processor

is an analogue-digital signal processor formed by a direct digital synthesizer (DDS) driven phase locked loop (PLL) radio frequency (RF) signal generator.

3. Transceiver apparatus as claimed in claim 1 or 2, characterized in that the frequency
5 conversion circuitry (3, 3') comprises at least one of a local oscillator (O) and a power divider (D) to supply a local oscillator power to the transmission path (Tx, Tx') and/or the reception path (Rx, Rx').
4. Transceiver apparatus as claimed in one of the preceding claims, characterized in that
10 the frequency conversion circuitry (3) comprises a mixer device (Tx₂, Rx₂) for converting the signal between an intermediate frequency (IF) and a radio frequency (RF).
5. Transceiver apparatus as claimed in one of the preceding claims, characterized in that
15 the frequency conversion circuitry (3') comprises a direct conversion device (Tx₁', Rx₁')
for converting the signal between a base band frequency (zero IF) and a radio frequency (RF), in particular by means of an IQ-method.
- 20 6. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna switch (SW, SW') comprises a matching unit (6) formed as a frequency regulated matching filter (Fig. 8) in order to provide an optimal matching factor for the antenna.
- 25 7. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna switch (SW, SW') comprises a bus connection (6') to the signal processor (DDS), wherein the bus-connection (6') is formed as a matching network.
8. Transceiver apparatus as claimed in one of the preceding claims, characterized in that
-

the antenna switch (SW, SW') further comprises a beam forming matrix device, in particular a Butler-output-matrix (BM) selected from the group consisting of: a 4x4, a 8x8 and a 16x16 Butler output matrix.

- 5 9. Transceiver apparatus as claimed in one of the preceding claims, characterized in that matching units (MF₁, MF₂, MF₃, MF₄) are provided inside the Butler-matrix (BM), in particular a modified Butler-output matrix output/input is formed as a frequency regulated matching filter (Fig. 10) in order to provide an optimal matching factor for the antenna.
- 10 10. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna terminal (AT) comprises a patching unit (PU) formed as a low-pass-filter to improve the matching of the antenna for different frequencies and/or for different modes of a multi-frequency communication system, in particular of a mobile cellular communication system or a personal communication system.
- 15 11. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna terminal (AT) comprises a matching unit for the antenna, in particular an LC component (L₁, C₁, L₂, C₂, L₃, C₃, L₄, C₄), in order to provide an optimal matching factor for the antenna.
- 20 12. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna terminal (AT) comprises at least two (Fig. 6), in particular four (Fig. 3), antennas.

13. Transceiver apparatus as claimed in one of the preceding claims, characterized in that

5 the antenna is formed as an s-loop antenna having two ends (CP₁, CP₂) formed as the transmission connector and/or the reception connector.

14. Transceiver apparatus as claimed in one of the preceding claims, characterized in that

10 the antenna is configured as a copper wired antenna, in particular as a flexible line antenna made of copper.

15. Transceiver apparatus as claimed in one of the preceding claims, characterized in that

15 the antenna is configured as a SMD-planar antenna.

16. Transceiver apparatus as claimed in one of the preceding claims, characterized in that

the antenna has a body and the body comprises an integrated patching (PU) and/or
20 matching unit (L, C).

17. Transceiver apparatus as claimed in one of the preceding claims, characterized in that

the antenna terminal (AT) forms a beam of 360 degrees, in particular the antenna beam
25 is
formed within a range of 200 degrees (Fig. 11).

18. Transceiver apparatus as claimed in one of the preceding claims, characterized in that the antenna beam comprises a 90 degree beam, in particular the beam is formed by

a 50 degree main beam and two 20 degree side beams (Fig. 12).

19. Base station for use in a multi-frequency communication system, comprising a transceiver apparatus (1, 1') as claimed in one of the preceding claims.

5

20. Method of transceiving a multi-frequency signal in a multi-frequency communication

10 system, comprising the steps of:

- processing the signal in a signal processor (DDS)
- frequency converting the signal in a frequency conversion circuitry (3, 3')
- operating an antenna terminal (AT, AT') by an antenna-switch (SW, SW'), and
- 15 - transceiving the signal by means of at least one antenna (A, A₁, A₂, A₃, A₄) of the antenna terminal (AT, AT')

characterized in that

- frequency converting of the signal in the frequency conversion circuitry (3, 3') is established on a transmission path (Tx, Tx') and a reception path (Rx, Rx'),
20 wherein each of the paths communicates the signal between the signal processor (DDS) and the antenna switch (SW),
- multi-frequency antenna terminal (AT) operation is established by combining a transmission-mode of the antenna and a reception-mode of the antenna (A, A₁, A₂, A₃, A₄), controlled by the signal processor (DDS), by means of:
- 25 - the antenna-switch (SW, SW') which comprises a multi-switch (MSW), a transmission multiplexer (TxMUX) and a reception multiplexer (RxMUX), wherein the multiplexers (TxMUX, RxMUX) are controlled by the signal processor (DDS) via the multi-switch (MSW), and
- communicating the signal between the transmission path (Tx, Tx') and the

antenna via the transmission multiplexer (TxMUX) and a transmission connector (CT₁, CT₂, CT₃, CT₄) of the antenna and between the reception path (Rx, Rx') and the antenna via the reception multiplexer (RxMUX) and a reception connector (CR₁, CR₂, CR₃, CR₄) of the antenna.

5

21. Method as claimed in claim 20, characterized by directly frequency converting the signal in a frequency conversion circuitry (3') between a base band signal (zero IF) and

a

radio frequency signal (RF).

10

22. Method as claimed in claim 20, characterized by frequency converting the signal in

a

frequency conversion circuitry (3) between an intermediate frequency signal (IF) and a radio frequency signal (RF)

15

23. Method as claimed in one of claims 20 to 22, characterized in that a reference of an incoming signal is processed in an antenna switch after checking a beam direction and a signal quality, in particular based on a BER- measurement.

20

24. Method of use of the transceiver apparatus as claimed in one of claims 1 to 19 in a multi-frequency communication system, in particular in a mobile cellular communication

system, in particular a mobile cellular communication system having a mode selected from the group consisting of: CDMA, FDMA and TDMA.

25

25. Method of use of the transceiver apparatus as claimed in one of claims 1 to 19 in a CDMA-FDMA/ TDMA and/or FDMA/TDMA (2.5G) multi-mode or combined system.

26. Method of use of the transceiver apparatus as claimed in one of claims 1 to 19 in a multi-frequency communication system, in particular in a personal communication

system, in particular in a personal communication system having a mode selected from the group consisting of: PCS/N, 3G and GSM.

27. Method of use of the transceiver apparatus as claimed in one of claims 1 to 19 in a
5 3G / GSM multi-mode or combined system.

28. Method of use of the transceiver apparatus as claimed in one of claims 1 to 19 in a mobile cellular communication system in combination with a personal communication system.

10

ABSTRACT

Transceiver apparatus for use in a multi-frequency communication system, base station of a multi-frequency communication system, method of use of the transceiver apparatus, method of transceiving a multi-frequency signal in a multi-frequency communication system

5


In a transceiver apparatus for use in a multi-frequency communication system a multi-frequency antenna terminal operation allows antenna transmission and reception-modes to be combined. A frequency conversion circuitry has a transmission path and a reception path, wherein each of these paths communicatively connects a signal
10 processor and an antenna switch. The antenna switch comprises a multi switch, a transmission-multiplexer and a reception-multiplexer, wherein the antenna switch may be controlled by the signal processor and the multiplexers may be controlled by the signal generator via the multi switch. The antenna has a transmission connector for connecting the transmission path to the antenna and a reception connector for
15 connecting the reception path to the antenna. Advantageous configurations of the transceiver provide an S-loop antenna design and phase matching units in an antenna terminal and a Butler-matrix of the antenna-switch. This provides an antenna and an antenna-switch with an optimal matching factor and consequently improves multi-frequency transceiver operation .

20

Fig. 1

25

Fig. 1

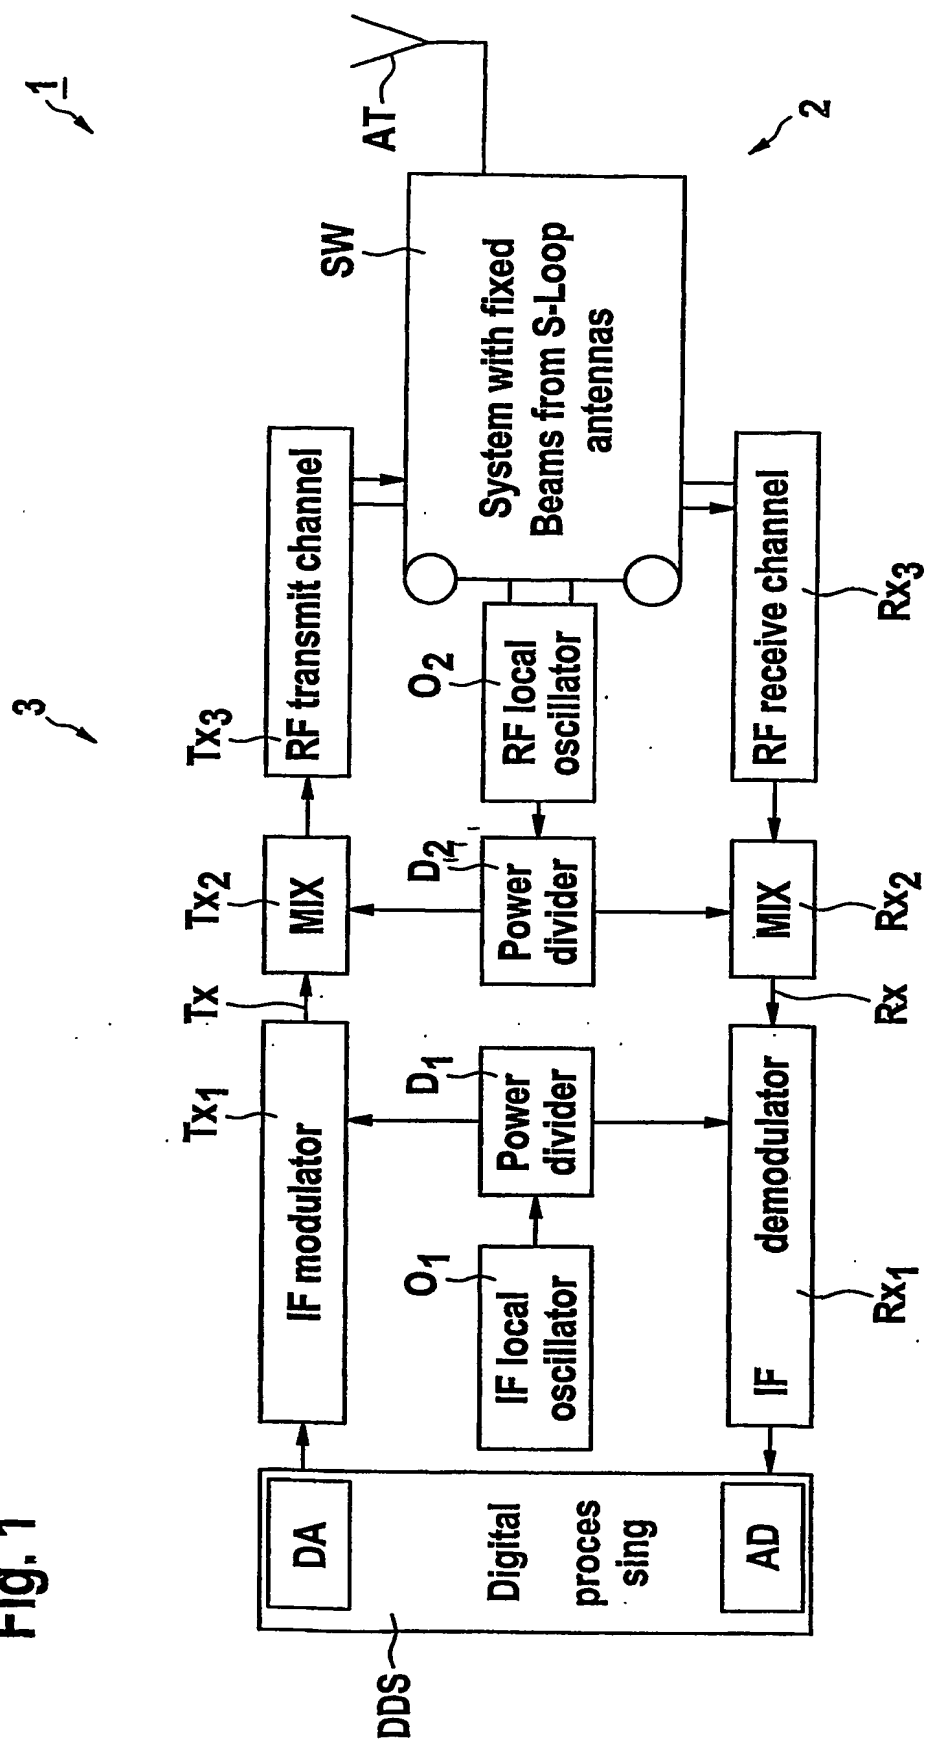

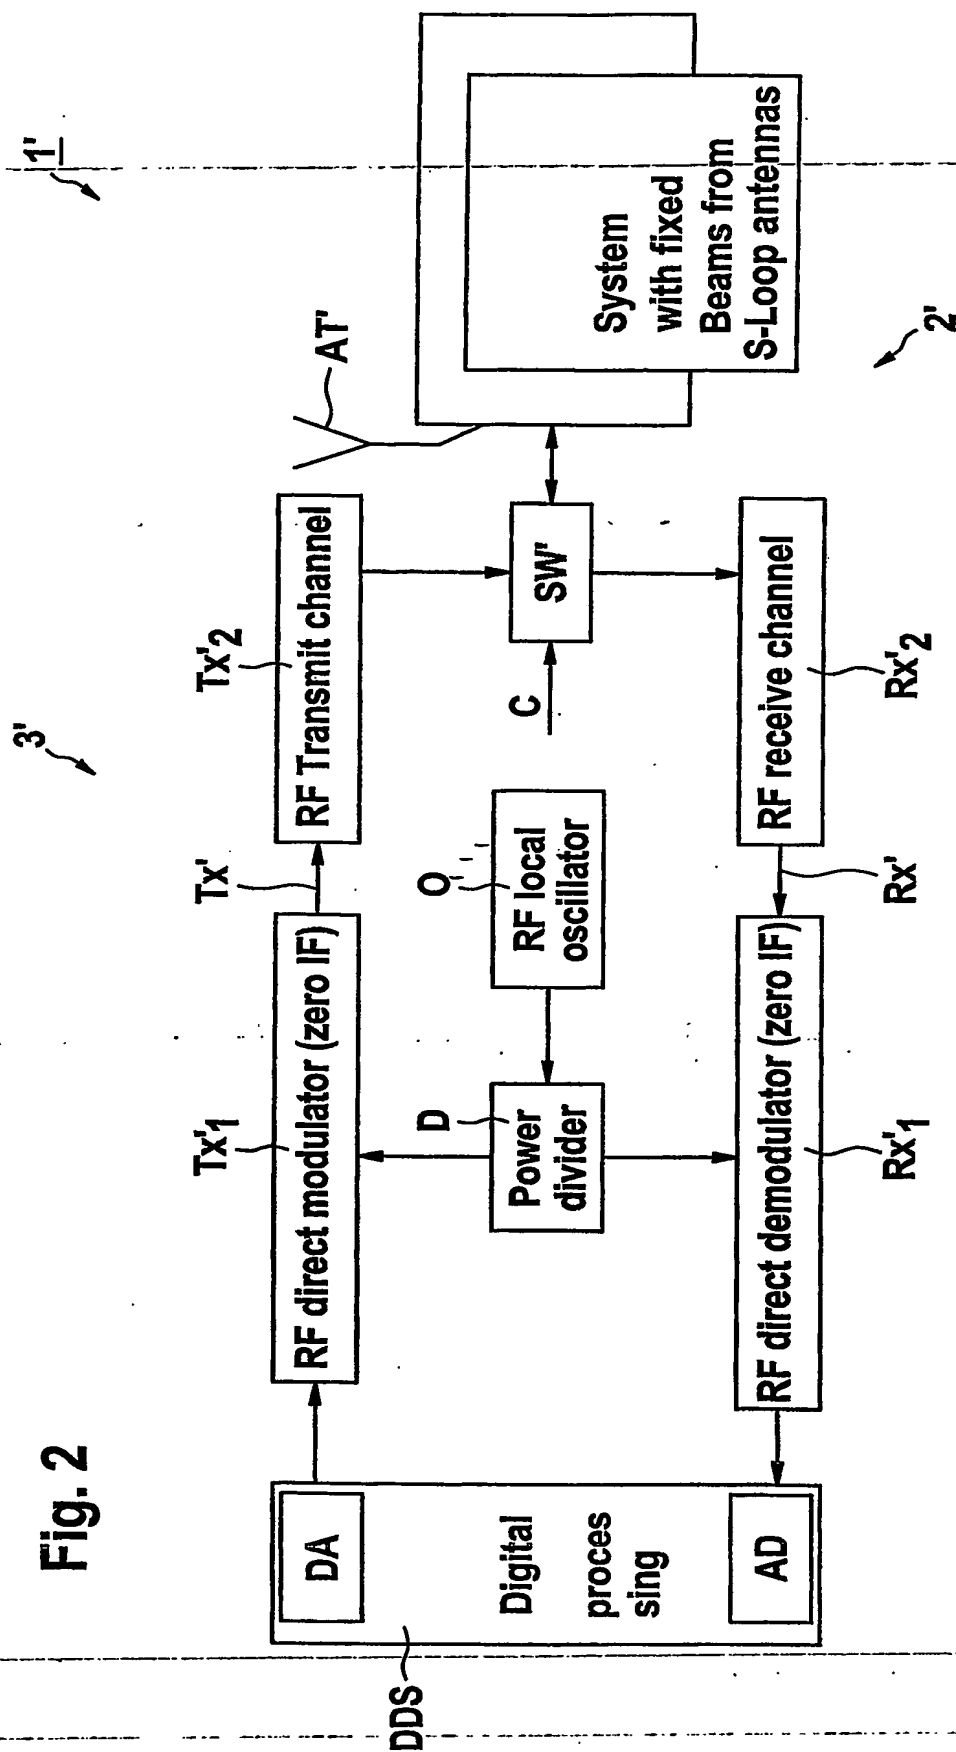


Fig. 3

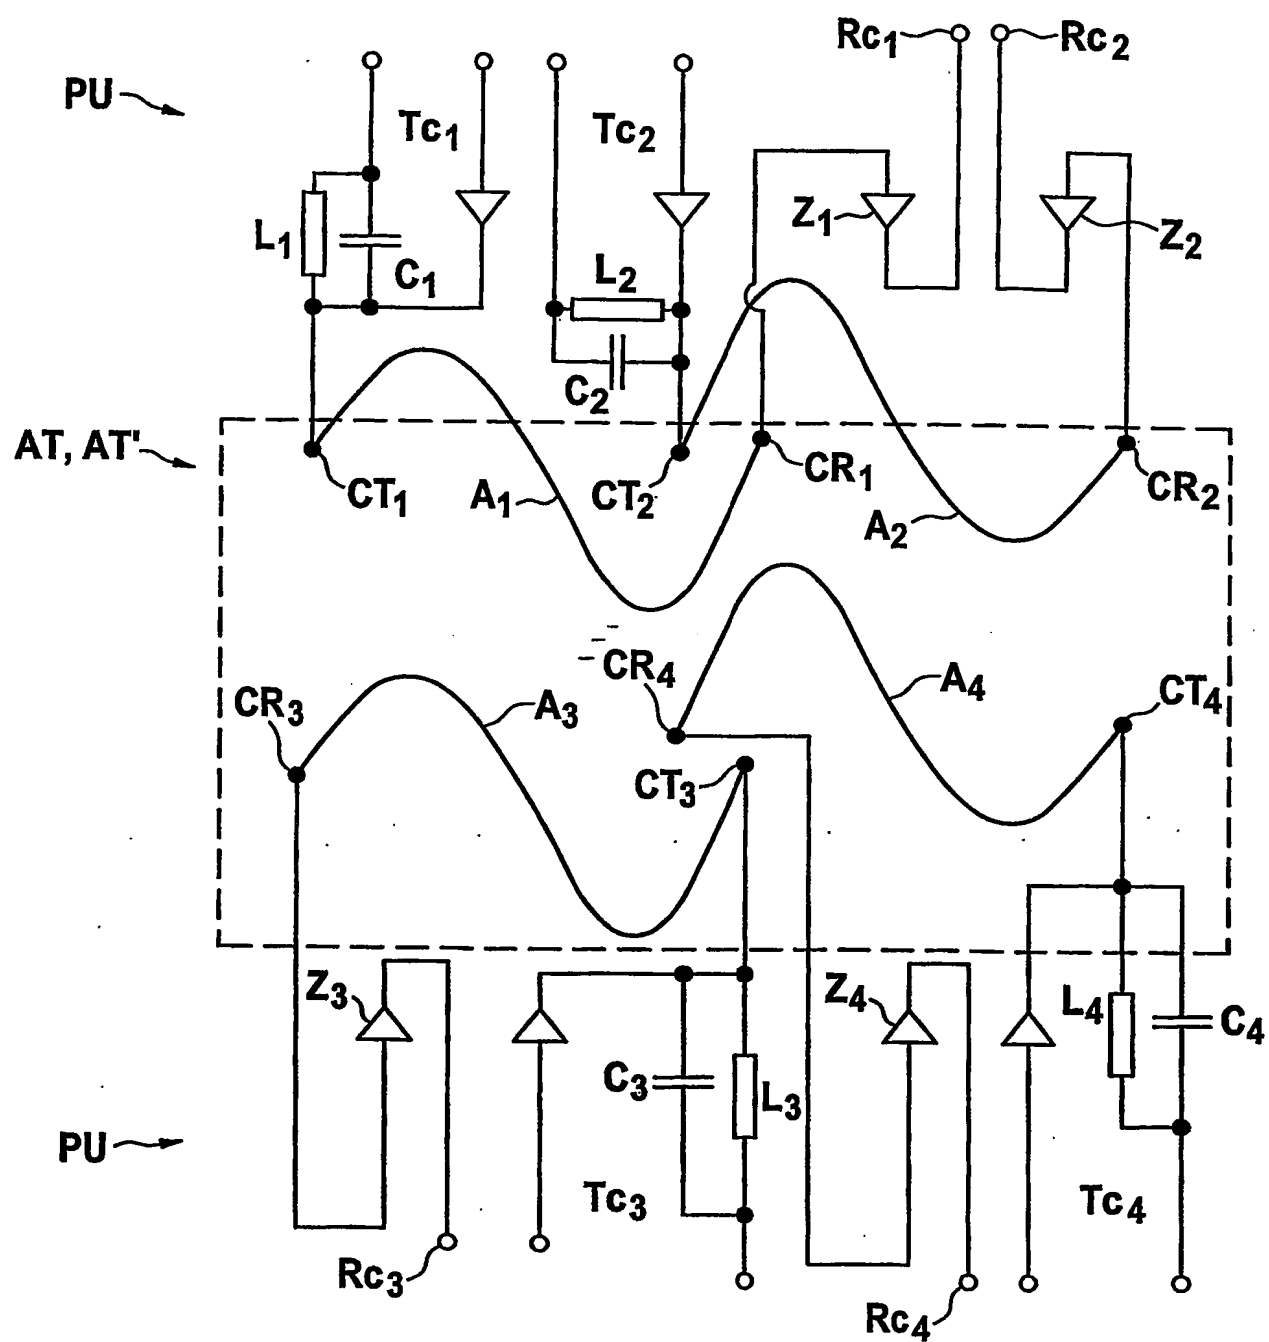


Fig. 4

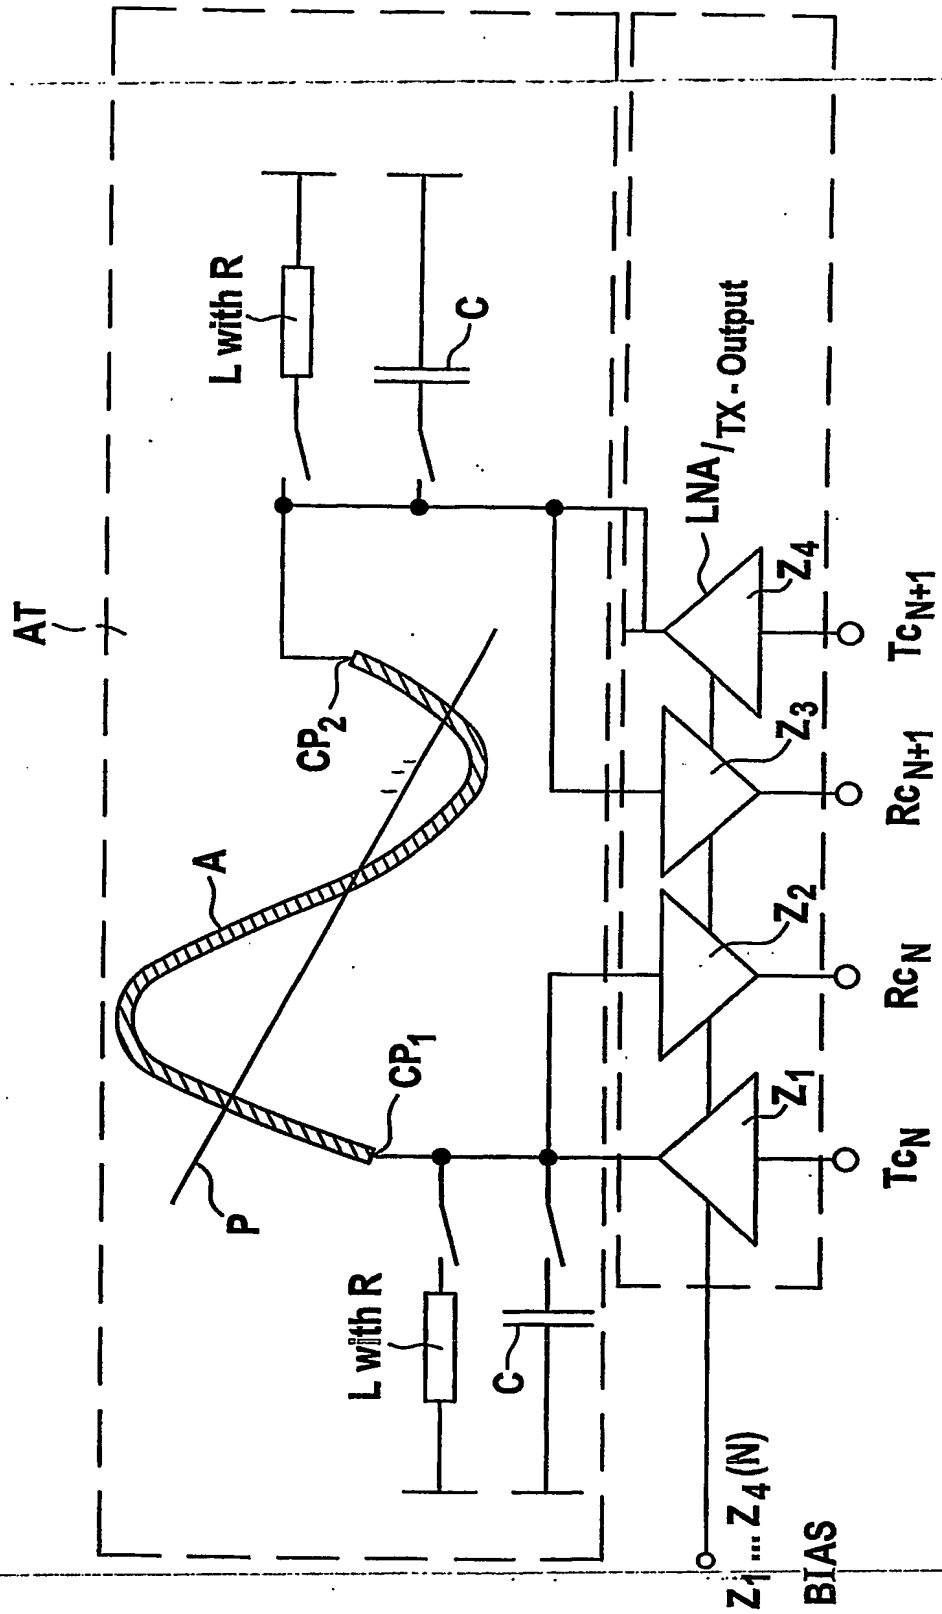
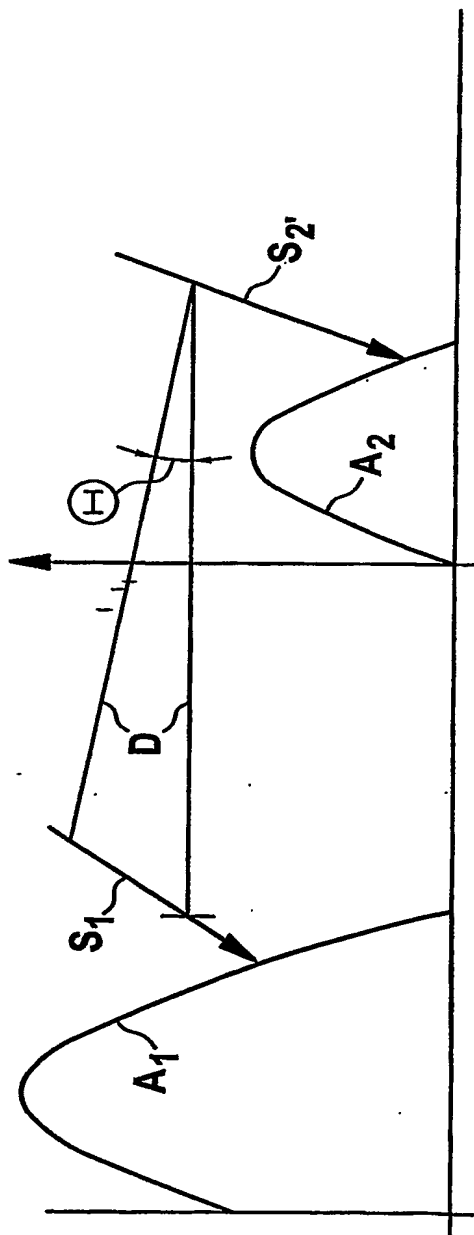


Fig. 5



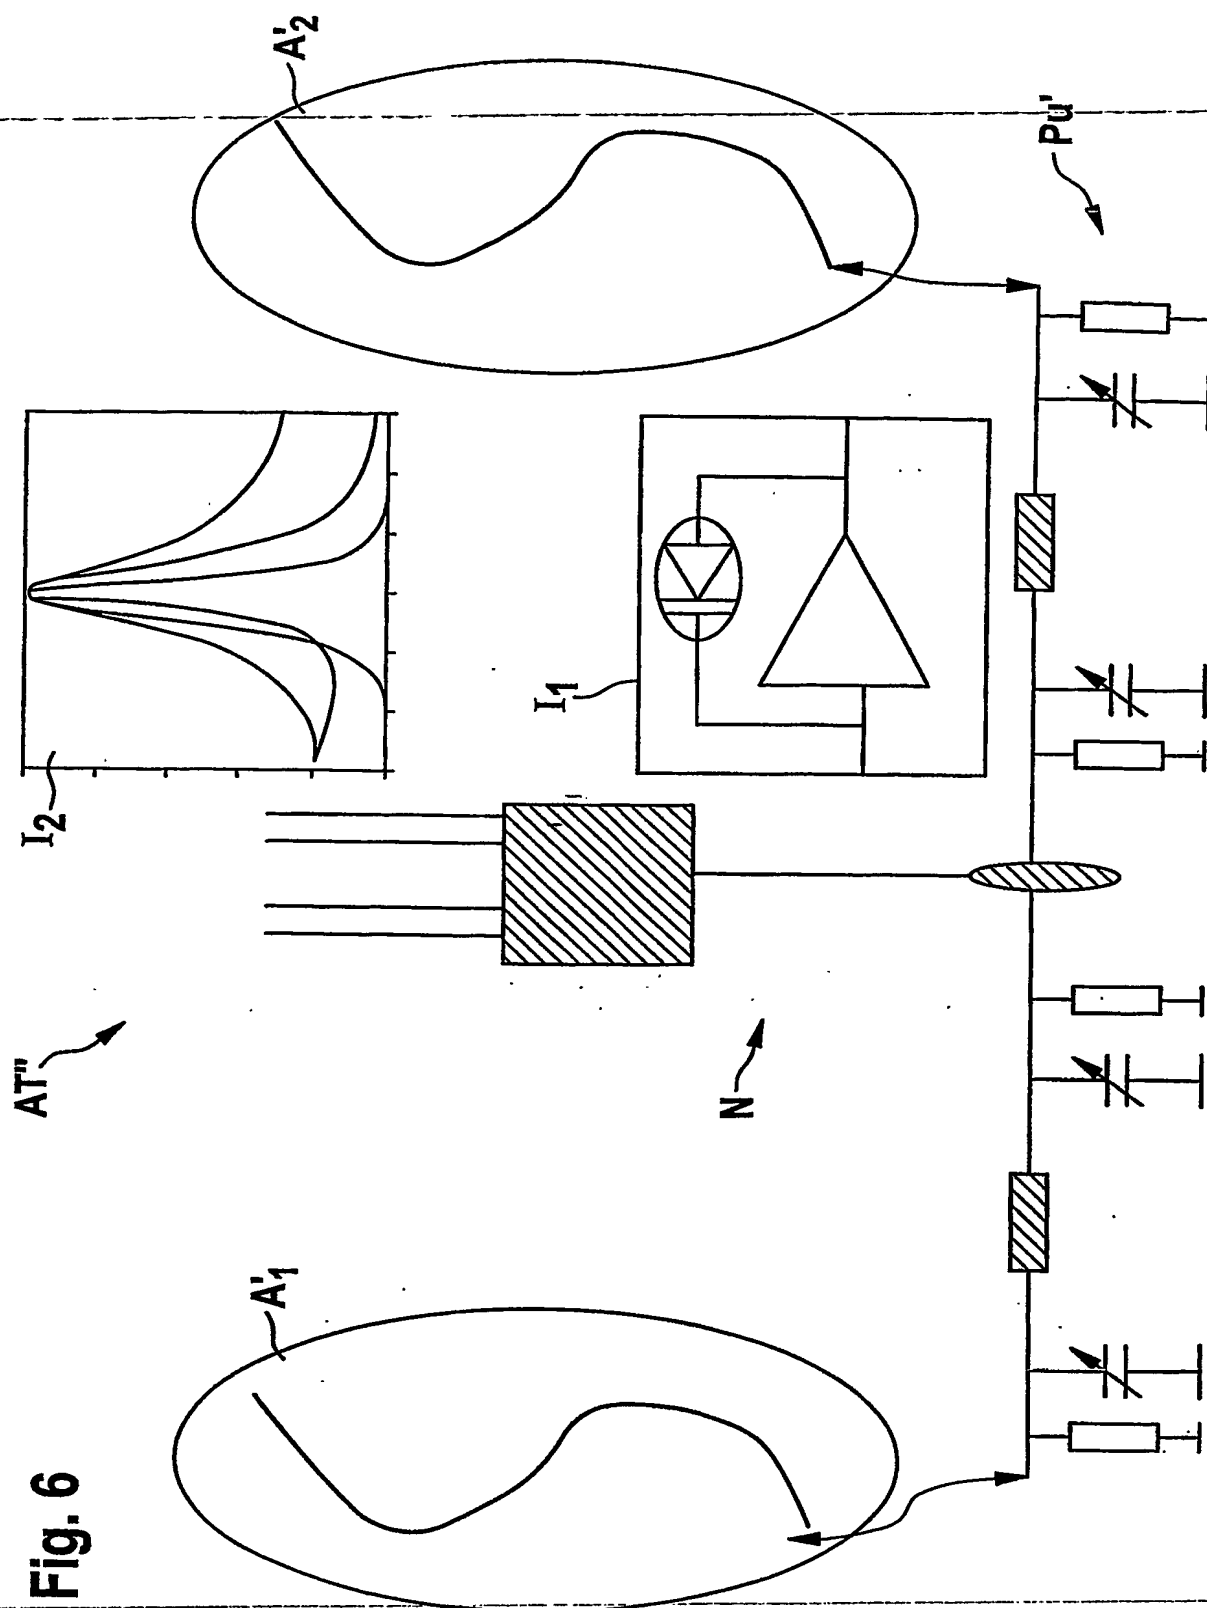
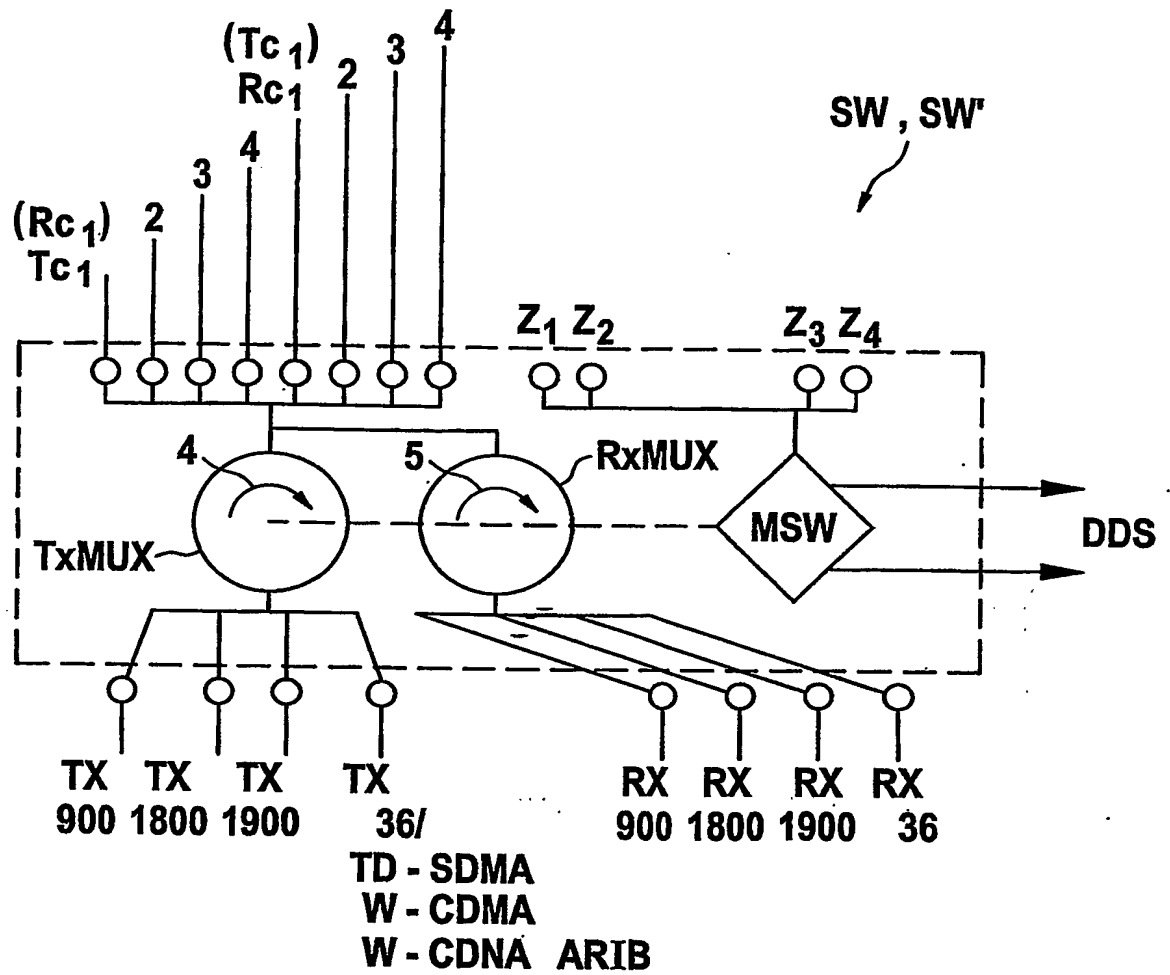


Fig. 7




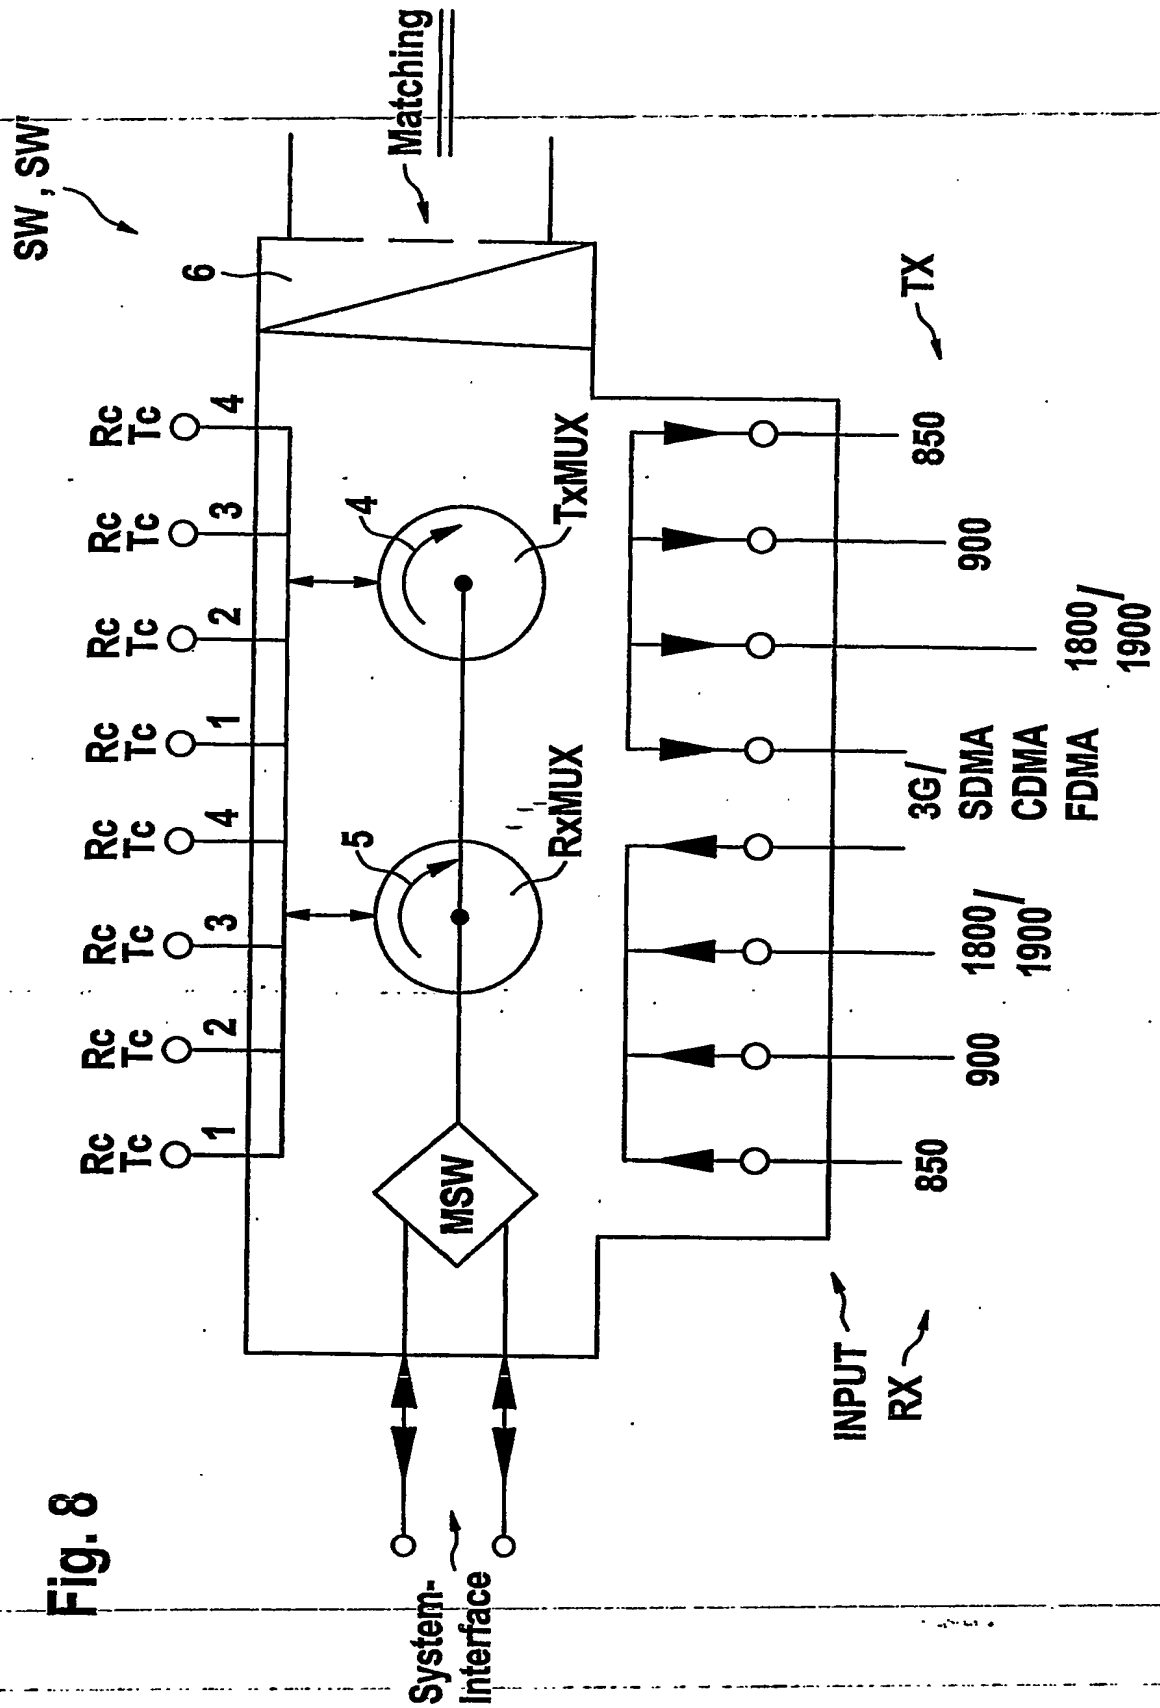


Fig. 9

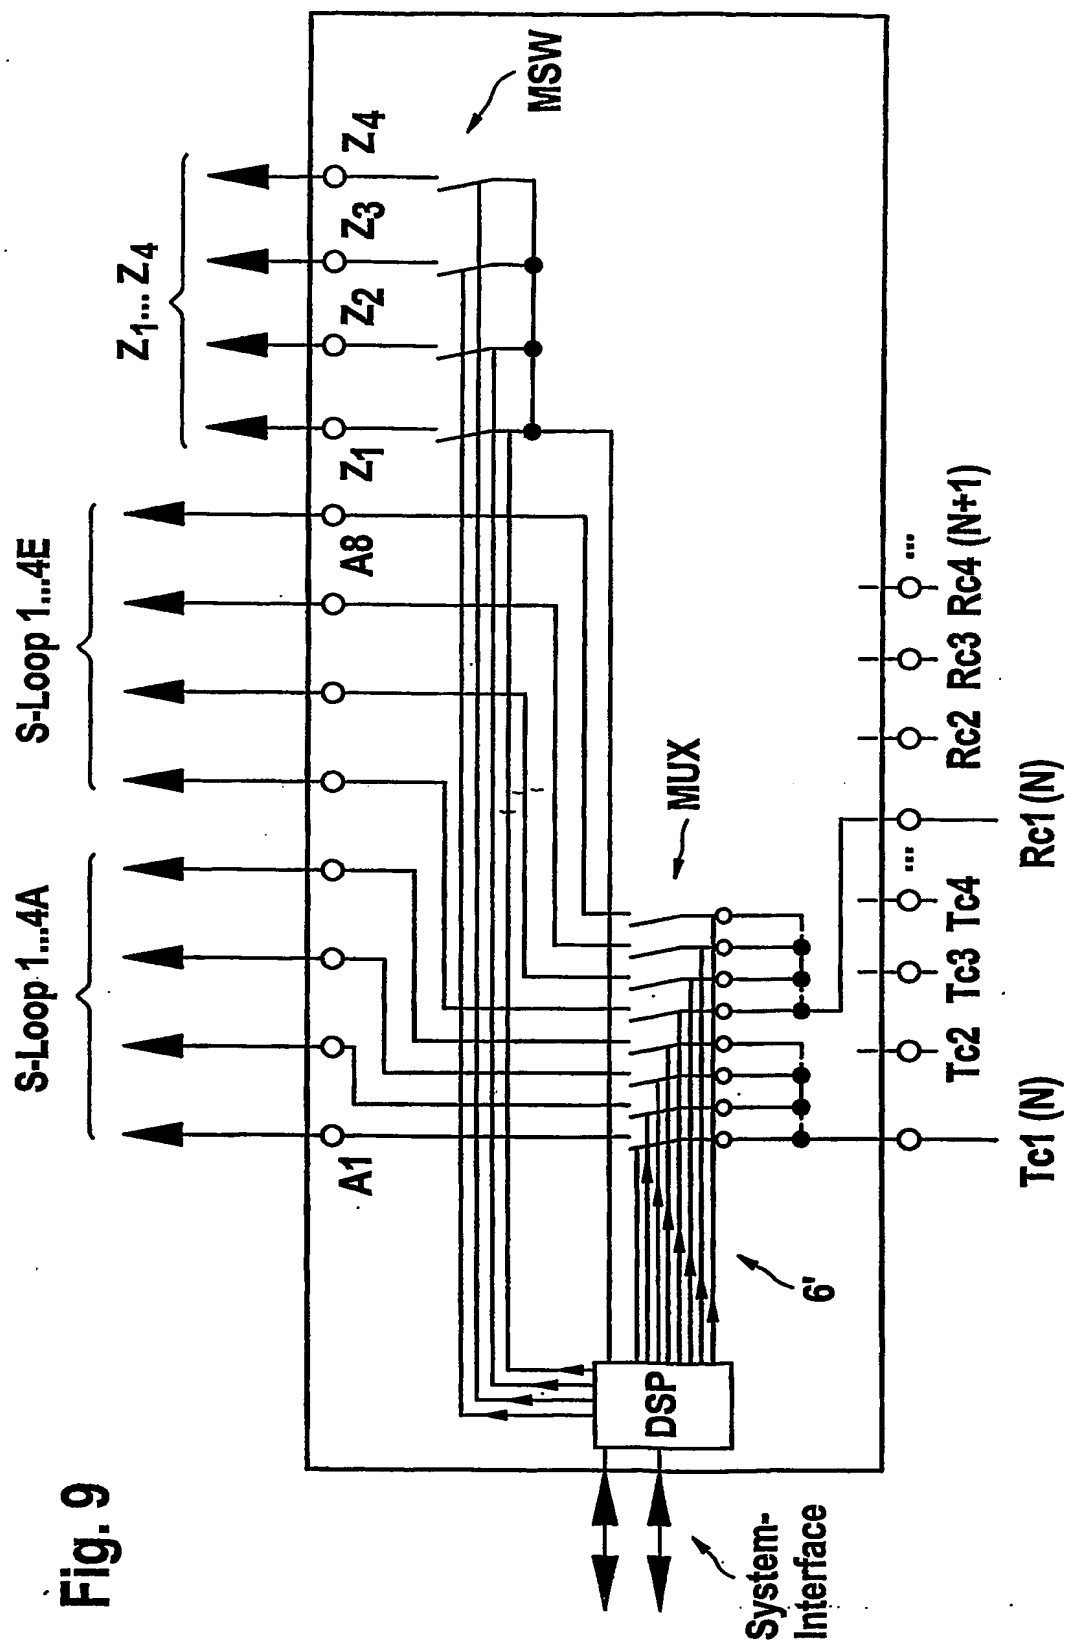

Reference - Channel if needed

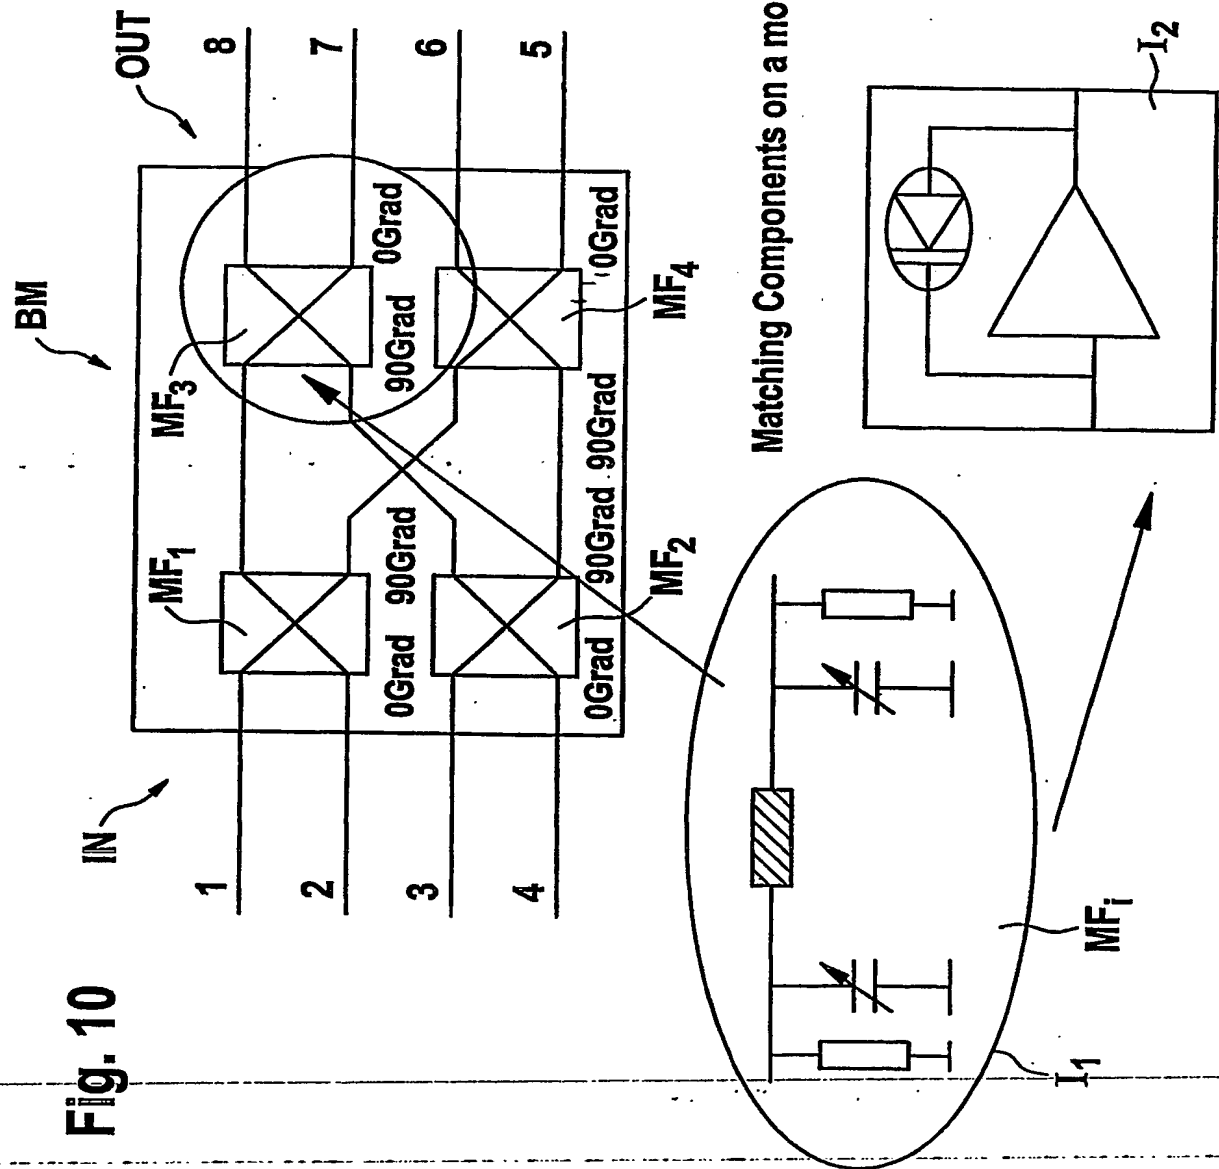
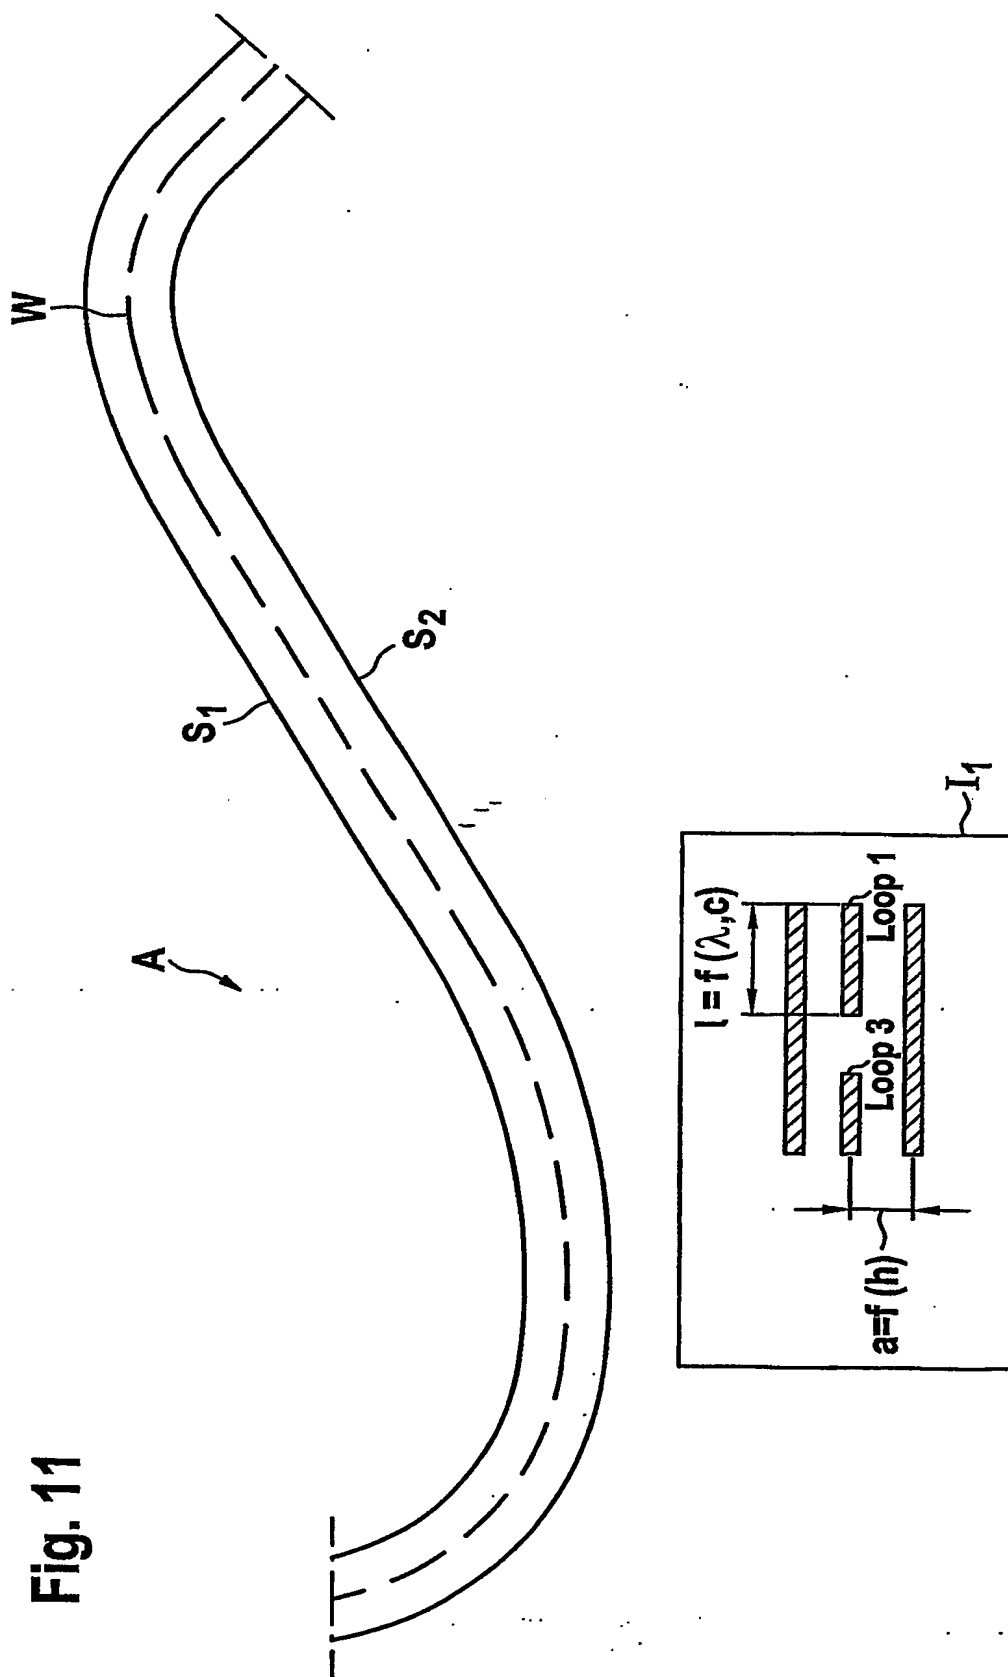


Fig. 11



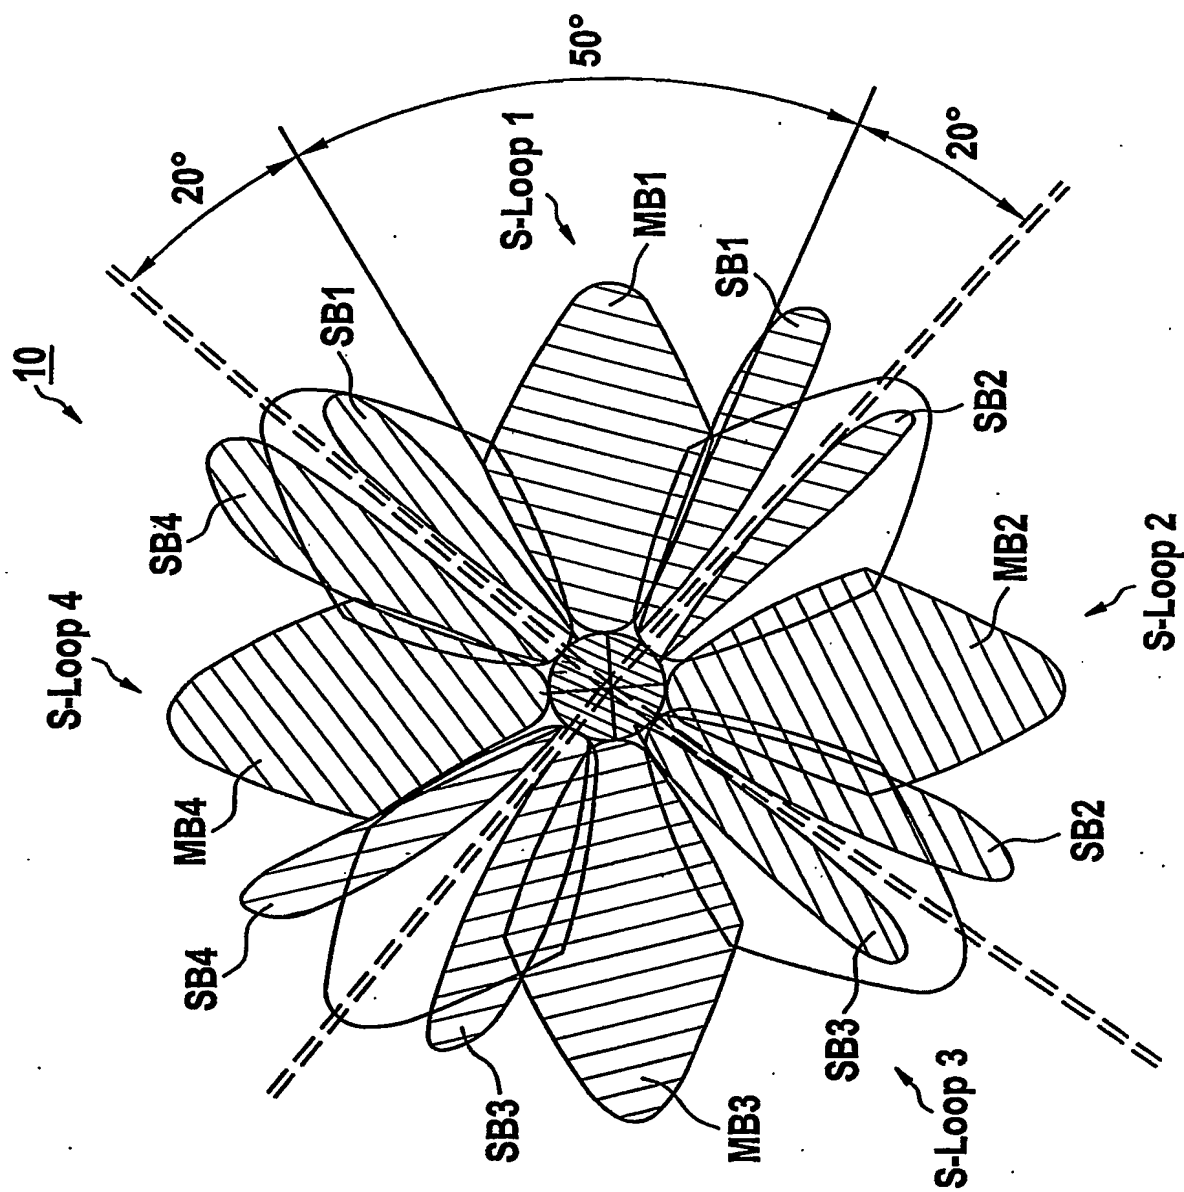


Fig. 12



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Generaldirektion 1

Directorate General 1

Direction Générale 1

Volmer, Georg, Dipl.-Ing.
Philips Intellectual Property & Standards GmbH,
Postfach 50 04 42
52088 Aachen
DE

Datum/Date

30/06/03

Zeichen/Ref./Réf.

PHCH020030 EP-P

Anmeldung Nr./Application No./Demande n°/Patent Nr /Patent No./Brevet n°.

02102240.5 2411

Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire

Koninklijke Philips Electronics N.V.

Übersendung von/Transmission of/Envoi de

Antrag vom/Request dated/Requête du 24/06/03

- ☐ Kopien bei Akteneinsicht nach Regel 94(3) EPÜ
Copies in the case of inspection of files pursuant to Rule 94(3) EPC
Copies en cas d'inspection publique selon la règle 94(3) CBE
- ☐ Beglaubigung
Certification
Certification
- ☒ 1 Prioritätsbeleg(e)/priority document(s)/document(s) de priorité R. 94(4)
- ☐ Ausfertigung(en) der Patenterkunde nach Regel 54(2) EPÜ
Duplicate of the patent certificate pursuant to Rule 54(2) EPC
Duplicate du certificat de brevet, selon la Règle 54(2) CBE
- ☐ Auszug aus dem Register nach Regel 92(3) EPÜ
Extract from the register pursuant to Rule 92(3) EPC
Extrait du registre selon la Règle 92(3) CBE
- ☐ Auskunft aus den Akten nach Regel 95 EPÜ
Communication of information contained in the files pursuant to Rule 95 EPC
Communication d'informations contenues dans la dossier selon la Règle 95 CBE
- ☐ Akteneinsicht nach Regel 94(2) EPÜ
Inspection of files pursuant to Rule 94(2) EPC
Inspection publique selon la Règle 94(2) CBE

Rechnung folgt/Invoice to follow/Facture suivra

unter Zugrundelegung von
on the basis of the following
sur la base suivante

Verwaltungsgebühr/Administration fee/Taxe d'administration

☒

Kosten für Kopien/Cost of copies/Frais pour copies (_____)

Blätter)
pages)
feuilles)

☐

Telefax

☐

☒

Zur Abbuchung vom laufenden Konto
to be debited from the deposit account
à débiter du compte courant

Nr.
No.
n°

28090021

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.